

SAVE THESE INSTRUCTIONS



CAUTION: RISK OF FIRE:



Never replace a Xenon (Xelogen) lamp with a regular Halogen lamp.
A regular Halogen lamp requires a protective glass shield.

- This product must be installed by a qualified electrician.
- Turn off power at circuit breaker before installing.
- To reduce risk of fire or electrical shock use this fixture indoors only.
- This product is **ETL** listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.
- Use MAX 35 Watt, Type Xelogen (Xenon) Bi-Pin Lamp.

ADJUST THE FIXTURE HEIGHT


- 1 Feed the fixture coaxial cable through the inner and outer glass shades. Slide the glass shades down the cord and rest them onto the socket assembly.

- 2 Cut the coaxial cable to the desired length with a sharp cutter. The overall fixture height is measured from bottom of the outer glass shade to end of the coaxial cable.

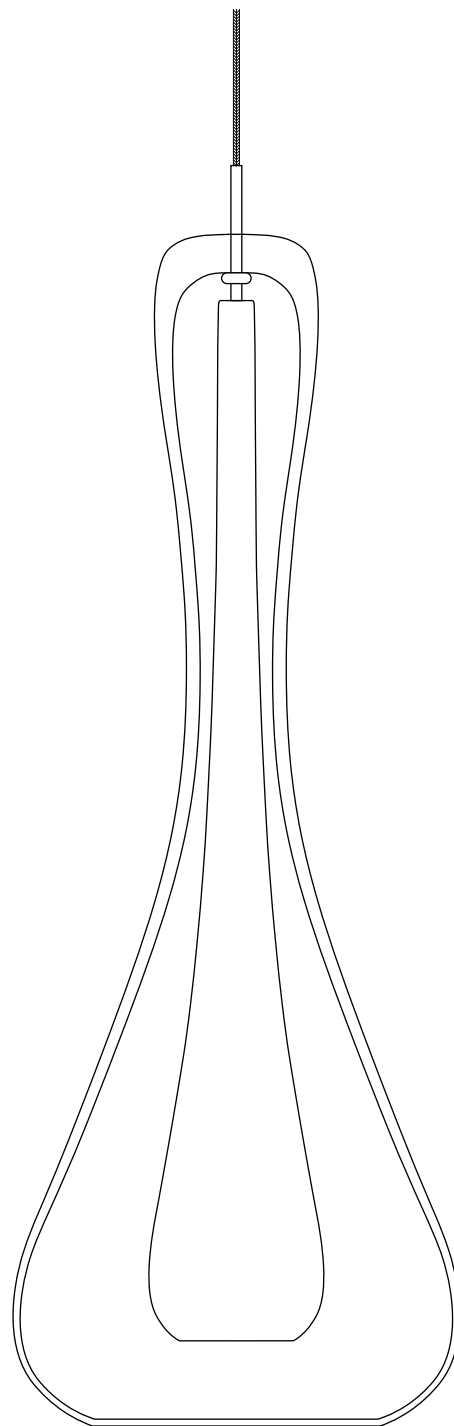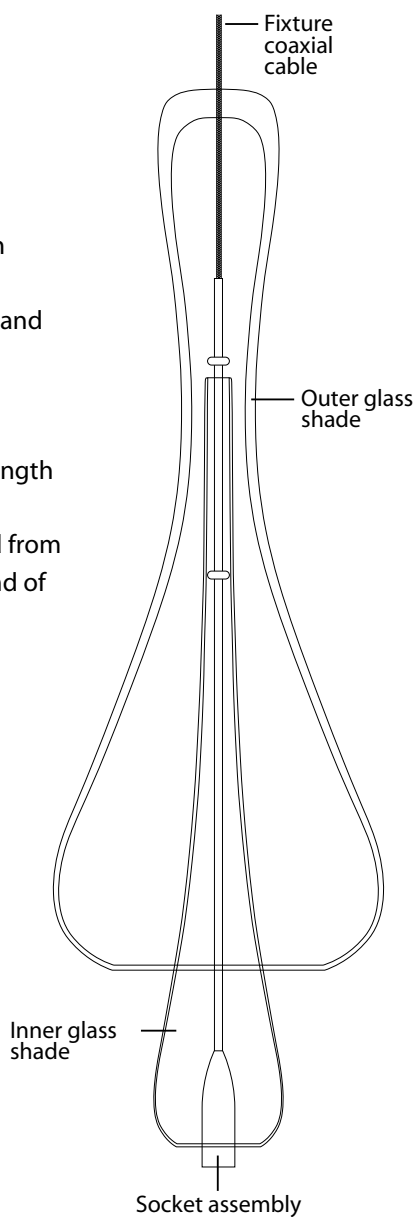


MAGIC DOPPIO PENDANT INSTALLATION INSTRUCTIONS

stone
LIGHTING

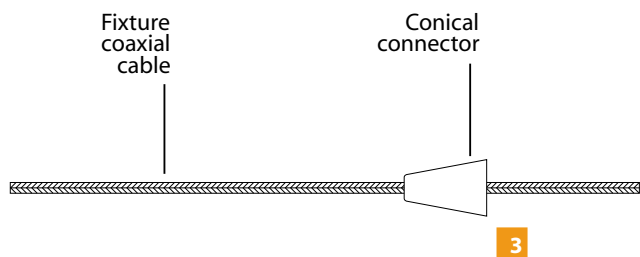


- 3** Insert the fixture coaxial cable through the conical connector

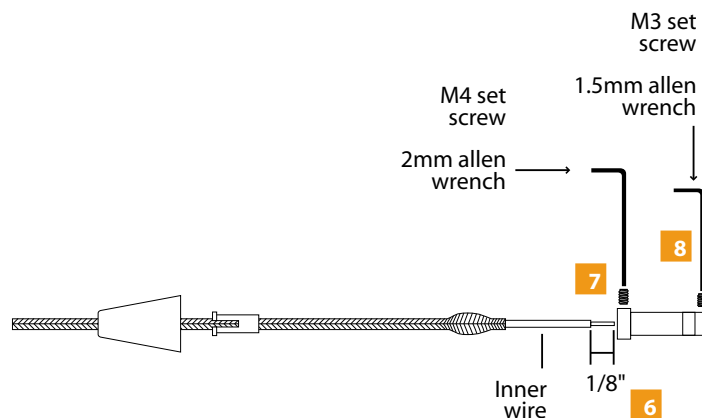


- 6** Strip 1/8" from end of the inner wire. Make sure that the stripped portion is not greater than 3/16".
- 7** Loosen (Do Not Remove) the M4 set screw with the provided 2mm Allen wrench.
- 8** Remove the M3 set screw with the provided 1.5mm Allen wrench.




- 4** Insert the coaxial cable through the flared end of the strain relief.

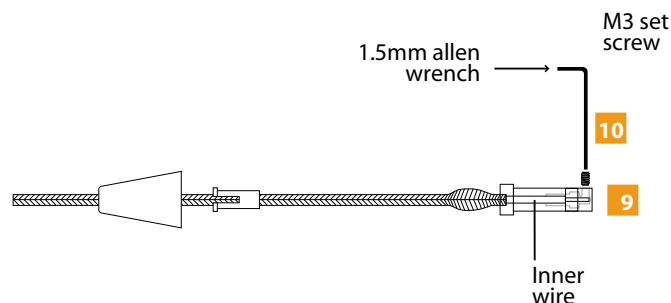


- 9** While inserting the inner wire into the connector look through the set screw hole to make sure that the stripped portion of the inner wire contacts end of the connector.
- 10** Hold the coaxial cable in place; replace and tighten the M3 set screw with the 1.5MM Allen wrench. Lightly tug on the coaxial cable to make sure that the set screw connection is tight.

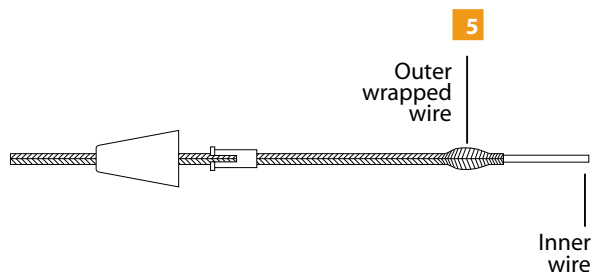

- 5** Slide the outer wrapped wire back to expose the inner wire.

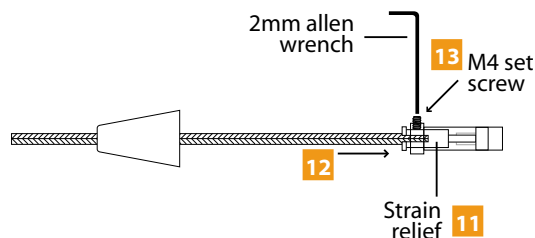

- 11** The strain relief slots should be rotated 90° away from the M4 set screw.
- 12** Slide and push the strain relief completely into the connector. This will force the outer wrapped wire to be inserted into the connector.
- 13** Tighten the M4 set screw with the 2mm allen wrench so that the strain relief holds the outer wrapped wire in place.

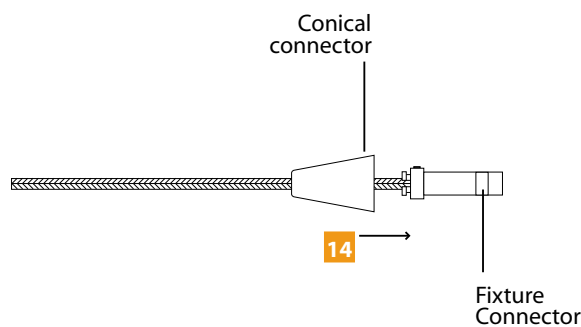


- 14** Slide the conical connector over the fixture connector.

To install the fixture, refer to the instructions provided with the system.


SAVE THESE INSTRUCTIONS

INSTALL THE LAMP

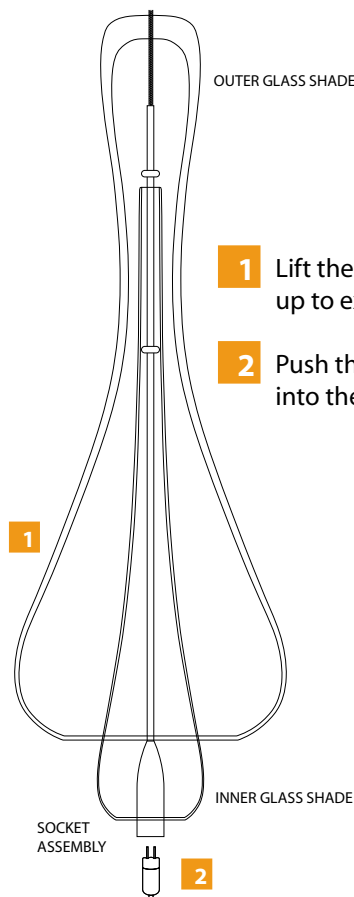

- 1** Lift the inner and outer glass shades up to expose the socket.
- 2** Push the lamp pins completely into the socket holes.

Lower the inner and outer glass shades onto the socket assembly

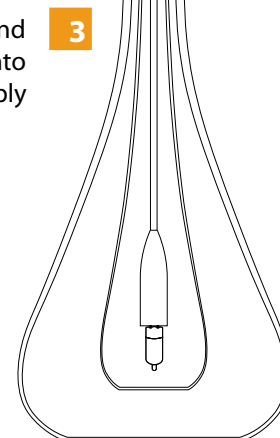

NOTE:

Use only your fingers and soft cloth to replace the lamp.

Use MAX 35 Watt, Type Xelogen (Xenon) Bi-Pin Lamp.

WARNING: RISK OF FIRE

Never replace a Xenon (Xelogen) lamp with a regular Halogen lamp. A regular Halogen lamp requires a protective glass shield.