Installation instructions for CH149 Rings Suspension

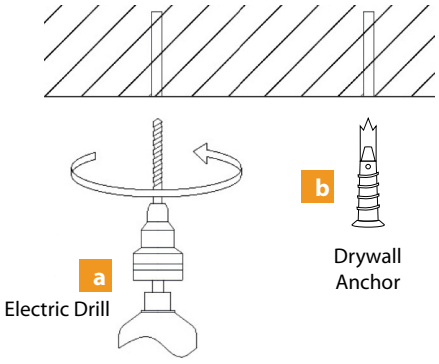

1

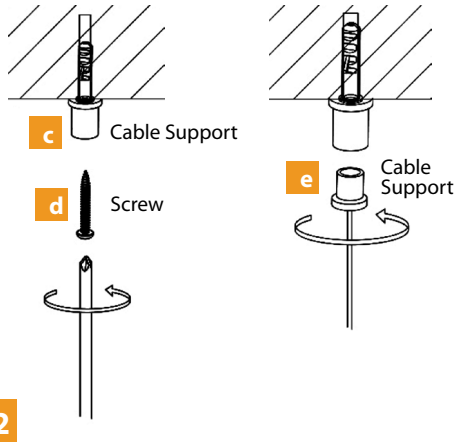

2

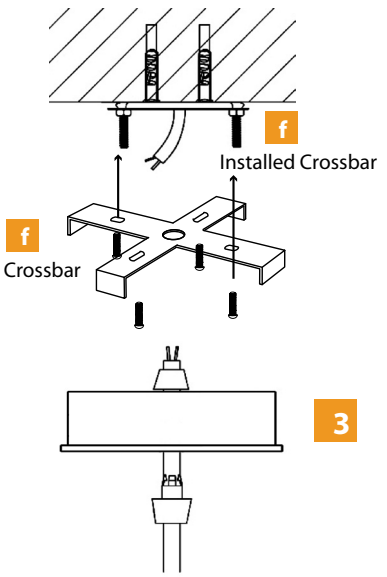

3

4

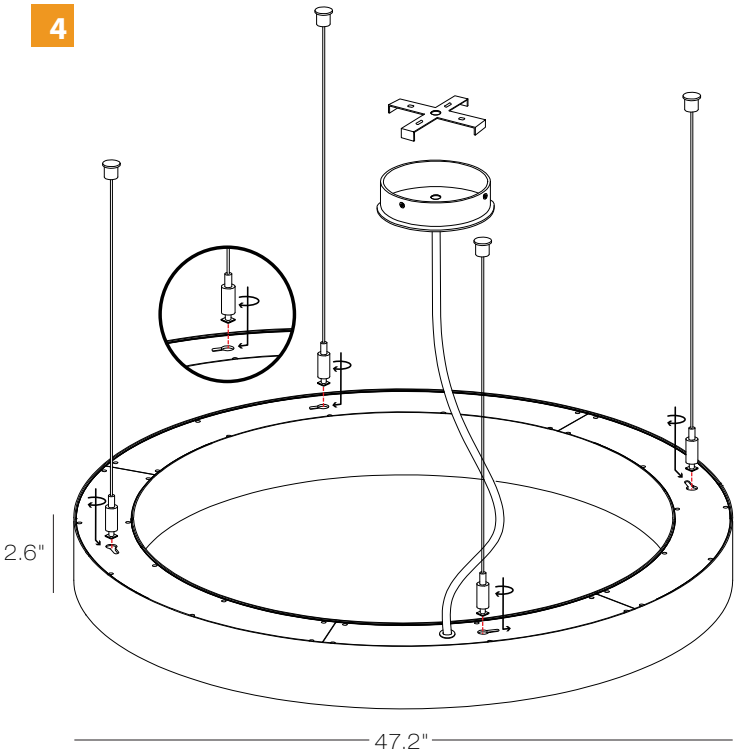

5

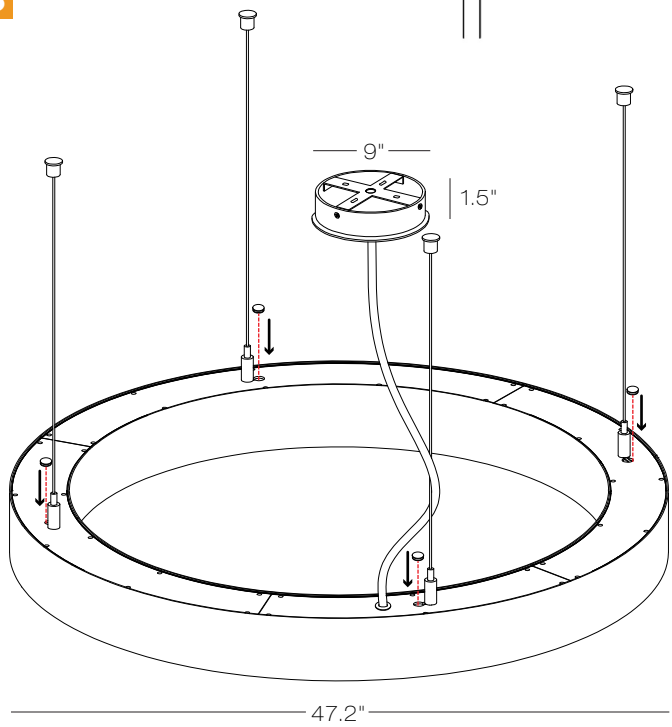

1. Lay ring on the floor below the install location. Using a plumb bob, or plumb spot laser, mark each mounting hole position on the ceiling.
2. Drill 1/16" pilot holes at marked hole positions. Install drywall or other anchors where appropriate, then install cable supports at drilled locations.
3. Install crossbar onto junction box.
4. Connect included metal cable to the ceiling cable supports. Measure hanging height, then attach cable to the fixture. Make final height adjustments as necessary.
5. With the fixture securely suspended by cable supports, shorten the power cord to reduce slack and neatly coil excess cord into the canopy.
6. Connect driver wires to building power and attach canopy to the crossbar.
7. Test fixture.

SAVE THIS INSTRUCTIONS