

STONE LIGHTING

June1, 2017

Assembly SD3316-12/SD3316-18/SDD3316-28

INSTRUCTIONS D' INSTALLATION

Round ceiling lamp

Important

- Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.
- Consult a qualified, licensed electrician to ensure correct branch circuit conductor.

Consultez un électricien qualifié pour vous assurer que les conducteur de la dérivation sont adéquats.

- 1.Shut off power to the outlet box.(A)
- 2.Use 3PCS self-tapping screws to hold the canopy(B) on the ceiling.
- 3.Make appropriate electrical connections using wire nuts
 - a.Connect the transformer's live wire (black) to the live outlet box wire.
 - b.Connect the transformer's neutral wire (white) to the neutral outlet box wire.
 - c.Connect the fixture's ground wire (green or uncoated) to the ground outlet box wire.
- 4.Place the spinning disk (C) at the canopy(B)
- Turn the cover (D) through the thread and screw in the canopy(B).
- 5.Restore power to the fixture.


Note

- This fixture is dimmable with Electronic Low Voltage(Trailing-Edge) type dimmers only.

Care Instructions

- Dusting: Use a clean, dry cloth.
- Cleaning: To protect the finish, avoid any harsh abrasives or chemicals.

LED Product Information and Warnings

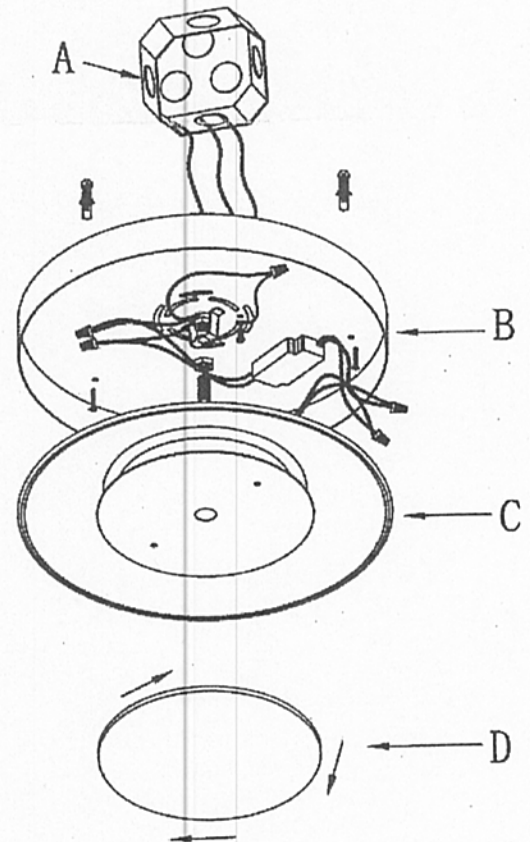

June1, 2017

Important

- **Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

- **Consult a qualified, licensed electrician to ensure correct branch circuit conductor.**

- Please read all included assembly instructions and warnings carefully before installation. Contact Customer Service if you have any questions or concerns. Before installation, please confirm that the fixture is compatible with your supply voltage and dimming system, if present.

- LEDs are highly sensitive electronic devices, and must be treated with care. Do not open any factory sealed compartments, and avoid touching the LEDs with your hands or any object.

- Although all our fixtures are equipped with protective devices, LED fixture are vulnerable to power surges and supply variations. Do not install LED fixture on the same circuit as any motors, appliances, or HVAC systems.

- Do not remove or bypass any LED Drive or Transformer that is provided with the fixture , and do not replace or substitute with another power supply.

- Remote LED Driver or Transformer installation must be done by a licensed electrician and in accordance with local codes. Remote installations should be in an accessible location, as close to the fixture as possible.

- Fixtures must be wired in parallel on independent leads; do not "daisy chain" multiple fixtures together or wire them in series.

- All factory-made splices and connections must remain intact. LED circuits are carefully designed and built, and improper connections may damage the fixture.

- The ends of coaxial pendant cords have been precisely stripped and split at the factory and must not be field cut. Excess cord or cable should be neatly coiled and reserved in the fixture canopy.

- Any mounting hardware is provided for your convenience and should be used with discretion. Always use the appropriate hardware for the mounting surface.