



Design Inspirations by STONE LIGHTING



stone
LIGHTING

Shown:
(2) CPEJRN55NHAL
(10) PD536SISNX3J



Design Inspirations by STONE LIGHTING

How to Buy Stone Lighting Products

Just visit: stonelighting.net
you will find information such as:
Sales Representatives, Showrooms,
on-line Catalog and more.




Light fixtures and lighting systems by Stone Lighting bear the ETL mark, giving assurance that the products are compliant with safety standards, having been tested and certified by Intertek, a nationally recognized testing laboratory.






Dazzle Collection	4 - 13
Beaux Arts Collection	14 - 17
Retro Collection	18 - 20
Doppio Wide	21
Leena Chandelier	22 - 23
Cloud Suspension	24 - 25
Gracie Collection	26 - 29
Jazz Collection	30 - 33
Diamanté	34 - 35
Alicia Wall	36
Margaux, Sonos	37
Kilo Retro	38 - 39
LED Cylinder	40
Panels	41
Alta Ceiling	42 - 43
Xylo Series	44 - 45
Layla Wall	46
Avenue Wall	47
Zo Zo Wall	48
Regis Wall	49
Echo Series	50 - 51
LED Tape Generation 2	52 - 53
Breeze Fans	54 - 55
14 Light Modular Canopy	56
3 Light Rectangular Canopy	57
Bronze Cable Light System	58 - 63
Soraa	64
Lamp Guide	65



Design Inspirations
by STONE LIGHTING

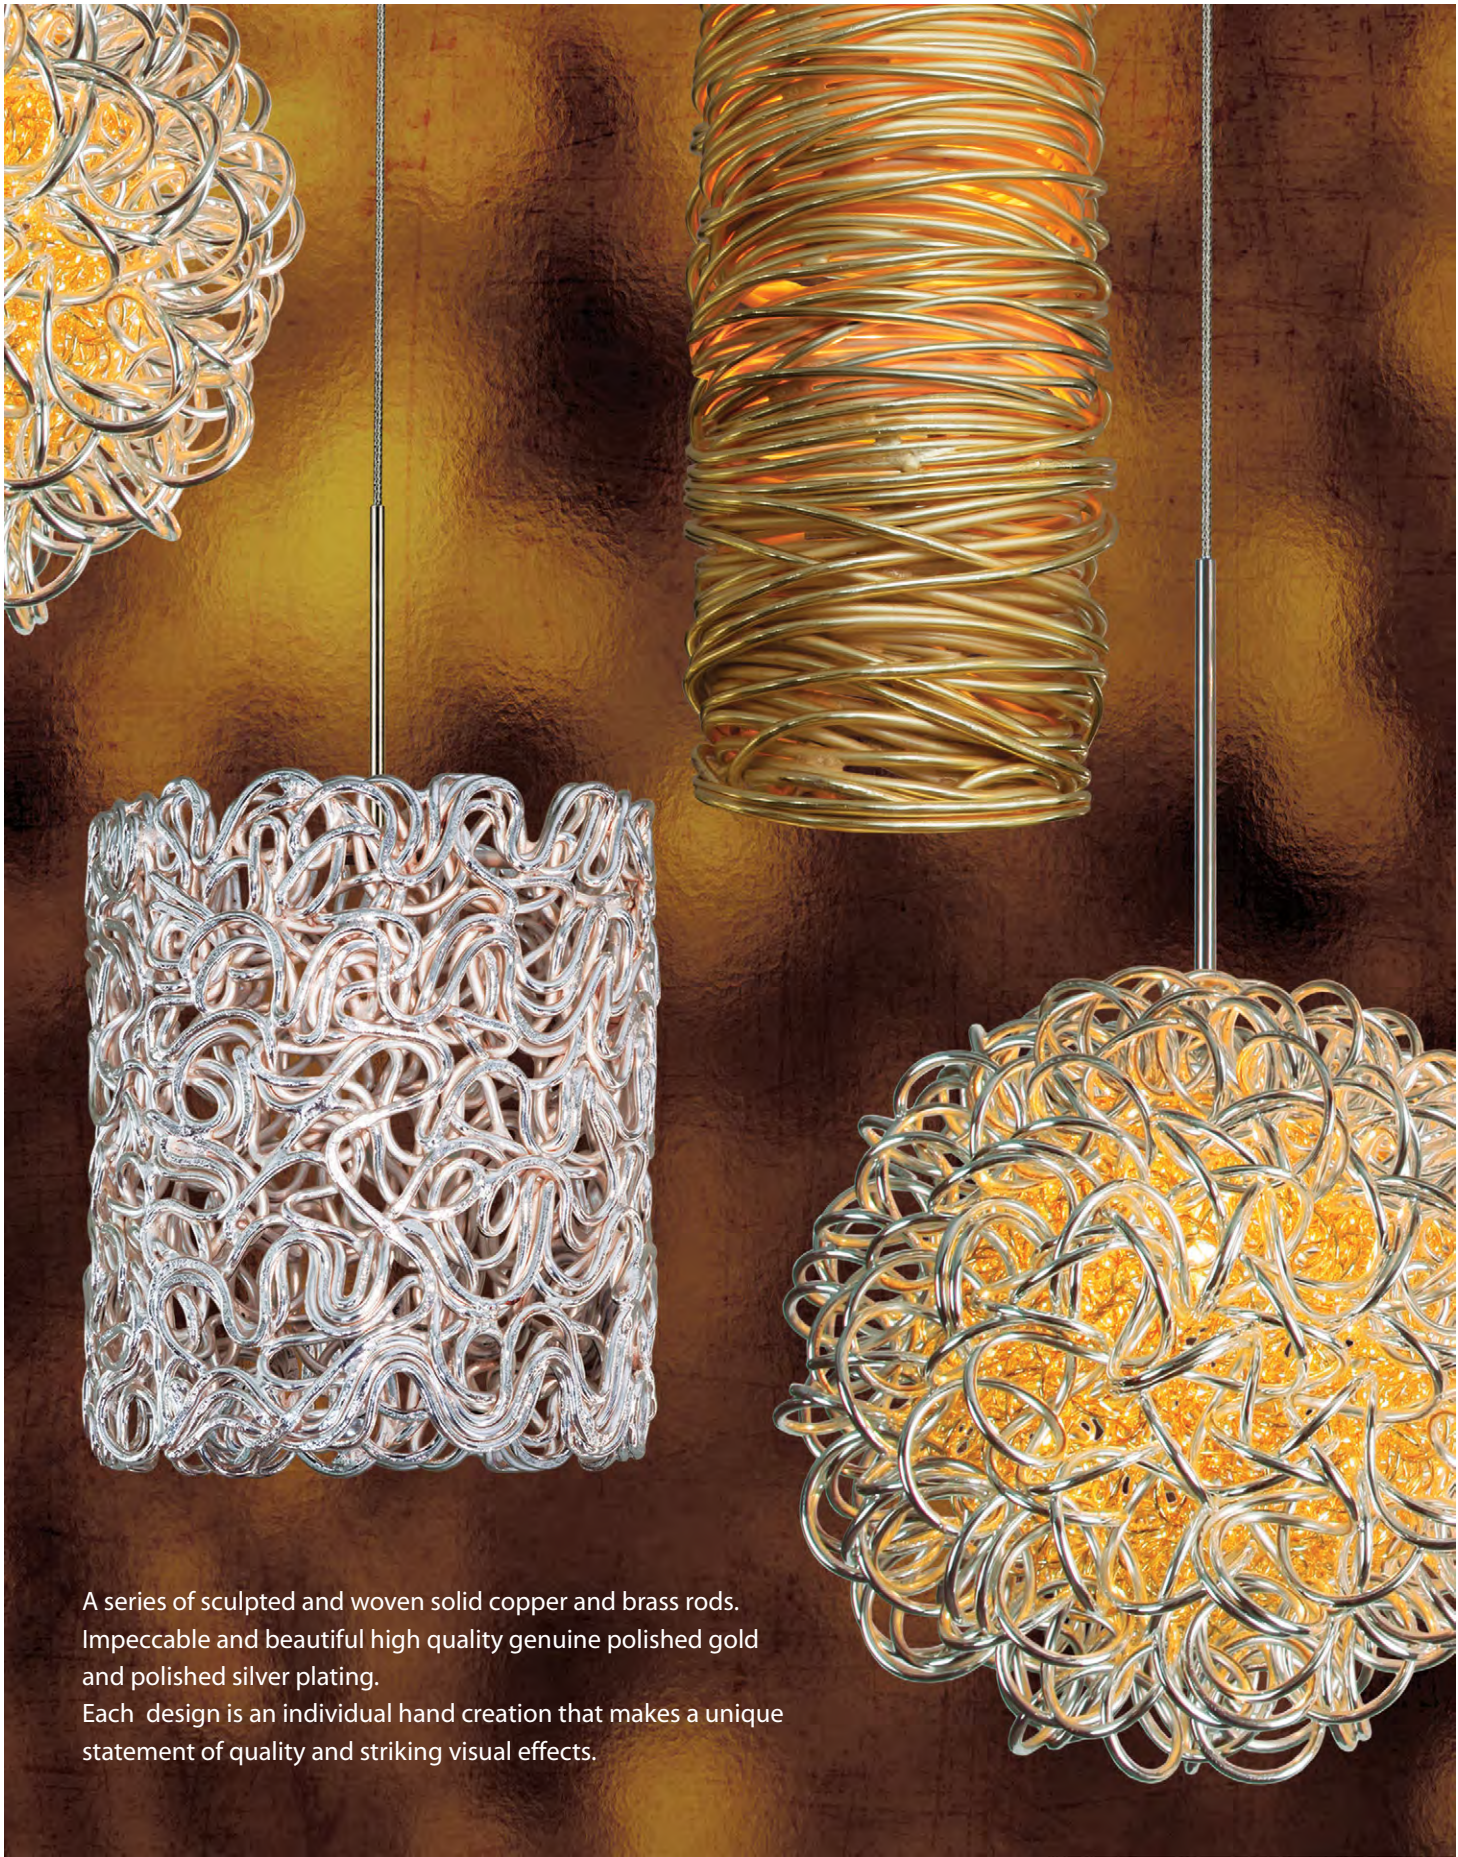

A series of sculpted and woven solid copper and brass rods. Impeccable and beautiful high quality genuine polished gold and polished silver plating. Each design is an individual hand creation that makes a unique statement of quality and striking visual effects.



Shown:
(3) PD531GOBZG975M

Spaga
Visually Artistic, each shade uniquely combined into a creation of tight curves and squiggles.

Model PD531	Spaga 12V			
	GO gold			L2 LED G4 JC 2W
	SI silver			X3 GY6.35 Xenon 35W
	Color Options	Finish	Lamp	Mounting
	SI	SN	X3	M
		BZ bronze		M monopoint canopy
		PG polished gold		R monorail adapter
		PN polished nickel		C cable adapter
		SN satin nickel		J EZ jack
Model PD531	Spaga 120V			
	GO gold			G975 G9 75W 120V
	SI silver			LG93 LED G9 2W
	Color Options	Finish	Lamp	Mounting
	GO	BZ	LG93	M
		BZ bronze		M monopoint canopy
		PG polished gold		
		PN polished nickel		
		SN satin nickel		





Spaga

Visually Artistic, each shade uniquely combined into a creation of tight curves and squiggles.

Model
WS531

Spaga Wall

GO gold	 L2 LED G4 JC 2W	
SI silver	 X3 GY6.35 Xenon 35W	
Color Options	Finish	Lamp
SI	SN	X3
	BZ bronze	
	PG polished gold	
	PN polished nickel	
	SN satin nickel	

Model
CL538

Spaga Ceiling 20"

GO gold	 CF26 Compact Fluorescent GU24 26W	
SI silver	 MB6 Medium Base Incandescent 60W	
	 RT6B Medium Base Retro Filament Bulb 60W	
Color Options	Finish	Lamp*
SI	SN	RT6B
	BZ bronze	
	PG polished gold	
	PN polished nickel	
	SN satin nickel	

*(3-Medium Base Sockets)


*(3-Medium Base Sockets)

Model
CL532

Spaga Ceiling 10"

GO gold	 CF13 Compact Fluorescent GU24 13W	
SI silver	 LA10 LED A19 10W	
	 RT6B Medium Base Retro Filament Bulb 60W	
Color Options	Finish	Lamp*
SI	SN	CF13
		*(3-Medium Base Sockets)
	BZ bronze	
	PG polished gold	
	PN polished nickel	
	SN satin nickel	

*(3-Medium Base Sockets)



Frosted acrylic diffuser to evenly diffuse light.





Shown:
WS537GOBZX3



Shown:
(5) PD537SISNX3M




Coil Short

Solid brass and copper bands stacked and combined creatively into a short wide cylinder.

Model
PD537

Coil Short 12V


GO gold	 L2 LED G4 JC 2W		
SI silver	 X3 GY6.35 Xenon 35W		
Color Options	Finish	Lamp	Mounting
SI	SN	X3	M
	BZ bronze		M monopoint canopy
	PG polished gold		R monorail adapter
	PN polished nickel		C cable adapter
	SN satin nickel		J EZ jack

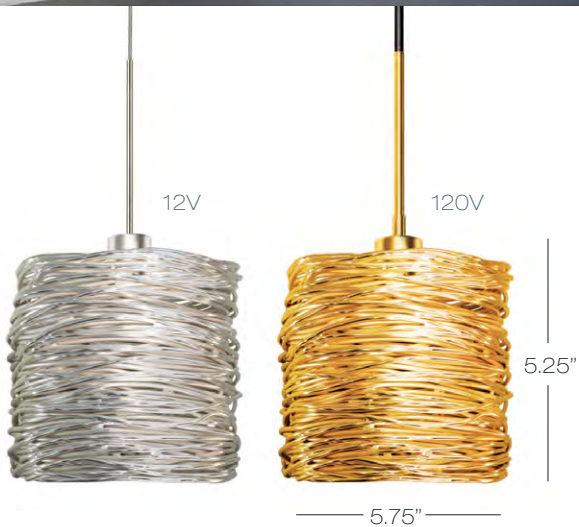

Model
PD537

Coil Short 120V

GO gold		 G975 G9 75W 120V	
SI silver		 LG94 120v 3.8w LED G9	
Color Options	Finish	Lamp	Mounting
GO	PG	LG94	M
	BZ bronze		M monopoint canopy
	PG polished gold		
	PN polished nickel		
	SN satin nickel		

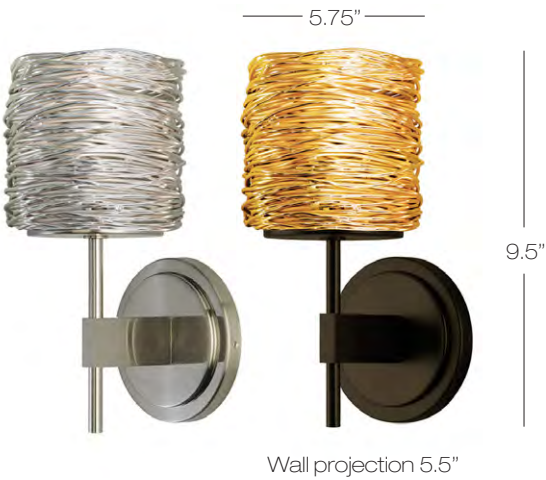

Model
WS537

Coil Short Wall

GO gold	 L2 LED G4 JC 2W	
SI silver	 X3 GY6.35 Xenon 35W	
Color Options	Finish	Lamp
GO	BZ	X3
	BZ bronze	
	PG polished gold	
	PN polished nickel	
	SN satin nickel	





Shown:
WS536SIPNX3



Shown:
PD536GOPNX3R, Monorail Install

Model

PD536

Kurly 12V

GO gold

SI silver

LED G4 JC 2W

GY6.35 Xenon 35W

Color Options

Finish

Lamp

Mounting

GO

PG

X3

M

BZ bronze

PG polished gold

PN polished nickel

SN satin nickel

M monopoint canopy

R monorail adapter

C cable adapter

J EZ jack

Model

PD536

Kurly 120V

GO gold

SI silver

G975 G9 75W 120V

LED G9 2W

Color Options

Finish

Lamp

Mounting

GO

PG

LG93

M

BZ bronze

PG polished gold

PN polished nickel

SN satin nickel

M monopoint canopy

Model

WS536

Kurly Wall

GO gold

SI silver

LED G4 JC 2W

GY6.35 Xenon 35W

Color Options

Finish

Lamp

GO

PG

X3

BZ bronze

PG polished gold

PN polished nickel

SN satin nickel

Kurly
Curled brass and copper spheres characterized by intricate silver or gold interior small spheres. Layered by alternate polished gold or silver larger outer layer.





Tubular Chandeliers and Wall Sconce Collection.
Tubular brass frames in plated brushed brass
and plated antiqued bronze finishes.

Medium base sockets with Retro Tubular
and A-Lamp Retro bulb options.

Boomer Chandelier

5 – Arm Tubular Chandelier with two 90° right angles that originate from a central stem. Medium Based Sockets. Standard with each chandelier: Sloped Ceiling Canopy and a set of stems and couplers(6",12", and 24").

Model
CH555

RT3A Medium Base Retro Filament Tube 30W

RT6B Medium Base Retro Filament Bulb 60W

RT4SA Medium Base Retro Spiral Tube 40W

Finish	Lamp
BB	RT3A

BB brushed brass

BZ bronze



Stilt Chandelier

7 - Arm Tubular Chandelier.
6 - arms symmetrically split plus one central arm. Medium base sockets standard with each chandelier. Sloped Ceiling Canopy and a set of stems and couplers (6",12", and 24").

Model
CH550

RT3A Medium Base Retro Filament Tube 30W

RT6B Medium Base Retro Filament Bulb 60W

RT4SA Medium Base Retro Spiral Tube 40W

Finish	Lamp
BB	RT3A

BB brushed brass

BZ bronze

Stilt Wall

2 – Split arm tubular Wall. Compliments Stilt Chandelier. Medium Based Sockets.

Model
WS550

RT3A Medium Base Retro Filament Tube 30W

RT6B Medium Base Retro Filament Bulb 60W

RT4SA Medium Base Retro Spiral Tube 40W

Finish	Lamp
BZ	RT3A

BB brushed brass

BZ bronze



Shown:
CH550BBRT4SA



Shown:
CH555BBRT4SA





Classic A-Type Edison and Tubular T-Type Retro lamps combine with heavy duty vintage sockets to create the base for an extensive collection of classic retro design options.

Vintage cloth cords suspend clear glass, Organza mesh shade combinations, industrial metal shades, and bare retro Edison lamps which can be offered as singular pendants or various styled multi-light canopies to create a multitude of chandelier design concepts and options.



Model No.	Color	Mesh	Finish	Braided Cord	Lamp
PD300	-	-	BZ, PN, SN	BL, BR, RD	-
PD301	-	-	BZ, PN, SN	BL, BR, RD	-
PD302	-	-	BZ, PN, SN	BL, BR, RD	-
PD310	-	-	BZ, PN, SN	BL, BR, RD	-
PD311	AM, CR, OP	-	BZ, PN, SN	BL, BR, RD	CF13, CF26, LA10, RT6B
PD312	-	-	BZ, PN, SN	BL, BR, RD	-
PD313	-	BZ, SI	BZ, PN, SN	BL, BR, RD	-
PD314	-	BZ, SI	BZ, PN, SN	BL, BR, RD	-
PD315	-	BZ, SI	BZ, PN, SN	BL, BR, RD	-

AM= amber, CR= clear, OP= opal, BZ= bronze, PN= polished nickel, SN= satin nickel, SI= silver, BL= black, BR= brown, RD= red.

A multitude of Multi-Light configurations is possible with every pendant shown. Complementary Wall Sconces can be found on pages 214-215 and Ceiling Fixtures on page 253 of Stone Lighting Catalog 40. For alternative lamp choices (LED and Fluorescent) Consult factory. All fixtures are provided with 8' of 3 wire UL listed cord.



LMPRT4SC Retro Spiral

T8 Tube Bulb 40 Watts / 120 volts
Medium Brass Base. Spiral Filament,
Dimmable.
Average life 1,500 hours.
Length 300mm



LMPRT4SA Retro Spiral

T9 Tube Bulb 40 Watts / 120 volts
Medium Brass Base.
Dimmable.
Average life 1,500 hours.
Length 185mm



LMPRT6B Edison

Edison Bulb 60 Watts /120 volts
Medium Brass Base.
Dimmable.
Average life 3,000 hours.



LMPRT4C Retro Bulb

T8 Tube Bulb 40 Watts / 120 volts
Medium Brass Base.
Dimmable.
Average life 1,500 hours.
Length 300mm



LMPRT3A Retro Bulb

T9 Tube Bulb 30 Watts / 120 volts
Medium Brass Base.
Dimmable.
Average life 3,000 hours.
Length 185mm



LMPRT6C Retro Bulb

T10 Tube Bulb 60 Watts /120 volts
Medium Brass Base
Dimmable
Average Life 1,500 hours
Length 300mm



Shown: PD421BBRT6CBLM

Doppio Wide

Antique style socket and shade with choice of retro style lamp or A19 style dimmable LED lamp, 120v.

Heavy gauge spun steel in 24" diameter. Plated in Brushed Brass or Brushed Bronze finish. Black or Brown cloth covered cord. 8 ft. Standard.

7 lamp choices: LA10, RT3A, RT4C, RT4SA, RT4SC, RT6B, RT6C.

Model
PD421

- LA10 LED A19 10W
- RT3A Medium Base Retro Filament Tube 30W, (185mm)
- RT4C Medium Base Retro Filament Tube 40W, (300mm)
- RT4SA Medium Base Retro Spiral Tube 40W, (185mm)
- RT4SC Medium Base Retro Spiral Tube 40W, (300mm)
- RT6B Medium Base Retro Filament Bulb 60W
- RT6C Medium Base Retro Filament Tube 60W, (300mm)

Finish	Lamp	Cord	Mounting
BZ	RT3A	BL	M
BB brushed brass		BL black	M monopoint canopy
BZ brushed bronze		BN brown	



Shown:
CH529AMCRPCLED
WITH #CBL1628



Shown:
CH529AMCRPCLED




Leena Chandelier

Organic curved canopy with (7)
LED MR-16 lights that illuminate 20 pcs of
mouth blown Amber and/or Clear scoop glass.



The glass hangs on 4 levels ranging
from 14" to 22" overall length.

For double the overall hanging lengths
(recommended for ceilings higher than 9').
Specify #CBL1628 Description:
4 sets of longer cables for 28" to 44" overall
hanging lengths.

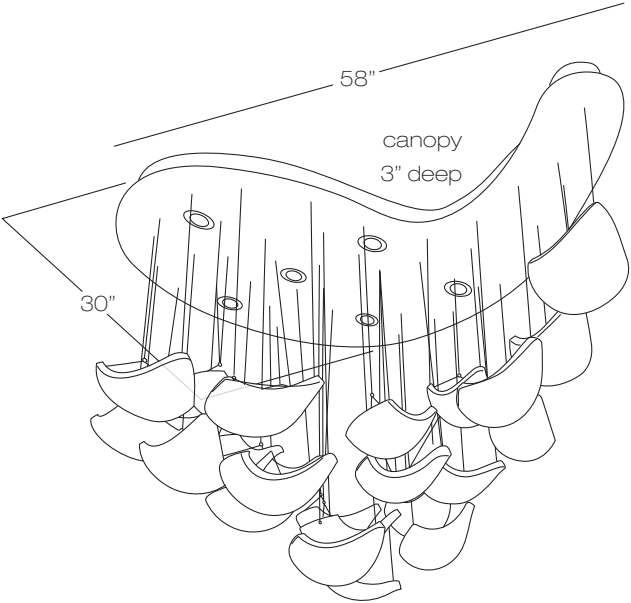

Model
CH529

Color Options		Finish	Lamp
AM	PC	PC polished chrome	LED
AM amber		D6 LED MR16 6W	
AMCR amber clear			
CR clear			

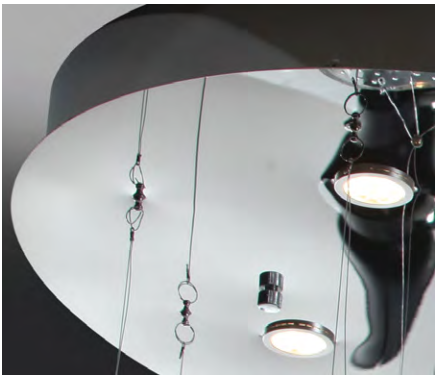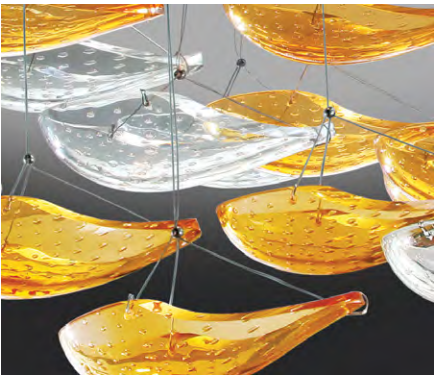



Cloud Suspension

Donut shaped satin cased opal glass suspension luminaire. Griplock cable height adjustable.

3 medium based sockets for incandescent or self ballasted screw in fluorescent lamping options.

Model
CH525

OP opal

CF13 Compact Fluorescent GU24 3x13W

MB4 Medium Base Incandescent 3x40W

Color Options	Finish	Lamp
OP	PC	MB4

PC polished chrome





Shown:
Gracie Frosted hanging from wall mounted monorail.

Gracie Collection

Pristine Leaded Crystal Glass Spheres. Offered in perfectly clear crystal and also with frosted interior lamp compartment.

Pristine unfrosted spheres throw an impressive clarity and glow, while frosted version softly diffuses lamp holder and lamp image while still offering a beautifully clear crystal sphere.

Model
PD091

Gracie

CR clear

CG cognac

FR frosted

 L2 LED G4 JC 2W

 X2 G4 Xenon 20W

Color Options	Finish	Lamp	Mounting
CR	SN	X2	M
BZ bronze			M monopoint canopy
PN polished nickel			R monorail adapter
SN satin nickel			C cable adapter
			J EZ jack

Model PD092	Gracie Frost			
	FR frosted		 L2 LED G4 JC 2W	
			 X2 G4 Xenon 20W	
	Color Options	Finish	Lamp	Mounting
	FR	SN	X2	M
	BZ bronze		M monopoint canopy	
	PN polished nickel		R monorail adapter	
	SN satin nickel		C cable adapter	
			J EZ jack	

Gracie Wall

Stone Lighting can offer Gracie Low Voltage Pendants in various wall mounted configurations.

All Gracie pendants can be mounted on Stone Lighting's Universal Low Voltage Adjustable Mounting Bracket (shown right).

Model WS092	Gracie Wall			
	CR clear		 L2 LED G4 JC 2W	
	FR frosted		 X2 G4 Xenon 20W	
Color Options		Finish	Lamp	
FR		PN	X2	
BZ bronze				
PN polished nickel				
SN satin nickel				





Gracie White

Stone Lighting now offers our 12v coaxial with a PVC white coating. White stem, white coaxial, and white monopoint canopies are standard when ordering PD093.

All other Stone Lighting Multi-Light canopies can also be powder coated in white upon custom request. (Consult factory)

Model PD093	Gracie White			
	CG	cognac	L2	LED G4 JC 2W
	CR	clear	X2	G4 Xenon 20W
	FR	frosted		
Color Options		Finish	Lamp	Mounting
FR		WH	X2	M
		WH white		M monopoint canopy
				R monorail adapter
				C cable adapter
				J EZ jack



Gracie 25 Light Canopy

Mounts to a standard 4" junction box. Equipped with (3) 150 watt electronic transformers.

Model CH09325				
	CR	clear	L2	LED G4 JC 2W
	FR	frosted	X2	G4 Xenon 20W
Color Options		Finish	Lamp	
FR		WH	X2	
		WH white		



Gracie Ceiling

Crystal hemisphere with frosted lamp compartment creates a beautiful ceiling or wall luminaire. 12V Halogen or LED.

Model CL092				
		L2	LED G4 JC 2W	
		X2	G4 Xenon 20W	
Color Options		Lamp		
FR		X2		
		FR frosted		





Jazz Crystal LED illuminated octagonal Swarovski Crystal Pendants.


Model PD223	CR clear	LED 2.8W Linear 3000K		
	Color Options	Finish	Lamp	Mounting
	CR*	PC	LED	M

PC polished chrome
M monopoint canopy
R monorail adapter
C cable adapter
J EZ jack



* For any of the colored Swarovski crystals shown, indicate your choice and consult factory for availability and pricing.

Model	Description	
PD223GSPCLEDR	Golden Shadow Polished Chrome 2.8W Linear 3000K	All fixtures include Monorail Adapter
PD223GTPCLEDR	Golden Teak Polished Chrome 2.8W Linear 3000K	
PD223CRPCLEDR	Clear Polished Chrome 2.8W Linear 3000K	
PD223ABPCLEDR	Crystal Blue AB Polished Chrome 2.8W Linear 3000K	
PD223SIPCLEDR	Silver Polished Chrome 2.8W Linear 3000K	
PD223LTPCLEDR	Light Topaz Polished Chrome 2.8W Linear 3000K	
PD223TZPCLEDR	Topaz Polished Chrome 2.8W Linear 3000K	
PD223BDPCLEDR	Bordeaux Polished Chrome 2.8W Linear 3000K	
PD223RSPCLEDR	Rosaline Polished Chrome 2.8W Linear 3000K	
PD223VTICLEDR	Violet Polished Chrome 2.8W Linear 3000K	
PD223MSPCLEDR	Medium Sapphire Polished Chrome 2.8W Linear 3000K	
PD223DSPCLEDR	Dark Sapphire Polished Chrome 2.8W Linear 3000K	
PD223EMPCLEDR	Emerald Polished Chrome 2.8W Linear 3000K	
PD223LPPCLEDR	Light Peridot Polished Chrome 2.8W Linear 3000K	
PD22330CR30GT40GSPCLEDR	30% Clear 30% Golden Teak 40% Golden Shadow 2.8W Linear	
PD22330EM40LP30CRPCLEDR	30% Emerald 40% Light Peridot 30% Clear 2.8W Linear	
PD22350CR50BDPCLEDR	50% Clear 50% Bordeaux 2.8W Linear	
PD22330TZ30BD40CRPCLEDR	30% Topaz 30% Bordeaux 40% Clear 2.8W Linear	
PD22340VI40RS20CRPCLEDR	40% Violet 40% Rosaline 20% Clear 2.8W Linear	
PD22340DS30MS30ABPCLEDR	40% Dark Sapphire 30% Medium Sapphire 30% Crystal Blue 2.8W Linear	





16"

2.5"

Model
PD323

CR clear

 **D6** Dimmable LED MR16 6w

Color Options	Finish	Lamp	Mounting
GO	PC	LED	M

BU blue	PC polished chrome	M monopoint canopy	
CR clear			R monorail adapter
GO gold			C cable adapter
GR green			J EZjack
RD red			

Jazz Downlighter


Dimmable LED MR16 Light source illuminates multifaceted crystal beads and creates effective down lighting source.



Jazz Wall

LED crystal wall sconce. Swarovski crystal makes this design beautiful and brilliant. Mounts horizontal or vertical.

Jazz Crystal

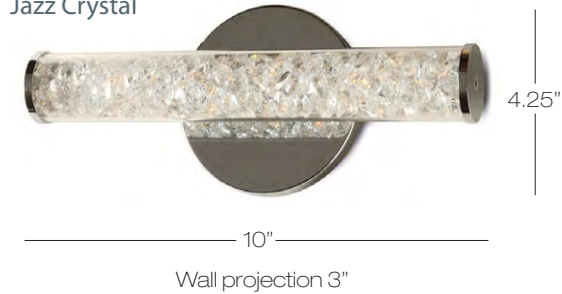

Model
WS223

Jazz Crystal Wall

CR clear		LED 2.8W Linear 3000K	
Color Options	Finish	Lamp	
CR*	PC	LED	
PC polished chrome			



Model
WS224

Jazz Venti Crystal Wall

CR clear		LED 5.9W Linear 3000K	
Color Options	Finish	Lamp	
CR*	PC	LED	
PC polished chrome			


* Photo shows fixture with clear Swarovski crystals. For any of the colored Swarovski crystals shown, indicate your choice and consult factory for availability and pricing.

Jazz Venti

14"

4.25"
Wall projection 4.5"



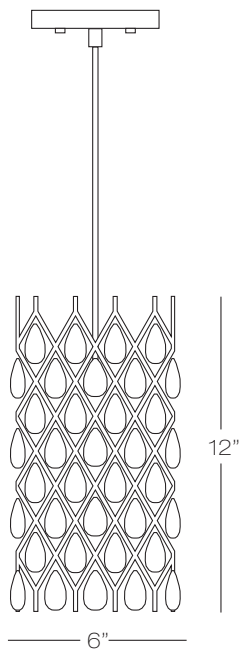

Diamanté Crystal Pendant

Expanded Polished Chrome Metal body and Clear Crystal Elements.

120 volt clear medium base 60 watt lamp.

Model
PD321

CR clear		MB6 Medium Base Incandescent 1x60W	
Color Options	Finish	Lamp	Mounting
CR	PC	MB6	M
PC polished chrome		M monopoint canopy	



Alicia Cristal Wall

Pristine leaded crystal flute rests on solid brass wall bracket.

Model
WS632

CR clear

Color Options

CR

PN polished nickel

SN satin nickel

Finish

SN

L2 LED G4 JC 2W

X2 G4 Xenon 20W

Lamp

X2

ADA
COMPLIANT



Sonos Up/Down

Anodized Aluminum wall washer up/down light. Wet Location Rated.

Model
WO808

GM5 GU10 120V MR16 2x50W

GL6 GU10 LED 2x6W 120v, CCT 3000K

Lamp

GM5

AL aluminum

Finish

AL

ADA
COMPLIANT

ETL
US



Sonos Down

Anodized Aluminum wall washer down light. Wet Location Rated.

Model
WO809

GM5 GU10 120V MR16 1x50W

GL6 GU10 LED 6W 120v, CCT 3000K

Lamp

GM5

AL aluminum

Finish

AL

ADA
COMPLIANT

ETL
US



Margaux

A contemporary bath bar featuring tubular cased opal glass that nicely diffuses incandescent or fluorescent light. Perfect for any wall sconce application, especially in damp locations. Satin Nickel Metal accents.

Model
WS211

MB6 Tubular T10 E26 60W

Q18 Compact Fluorescent Quad 2x18W

Lamp

Q18

OP opal


Color Options

OP

SN satin nickel

Finish

SN

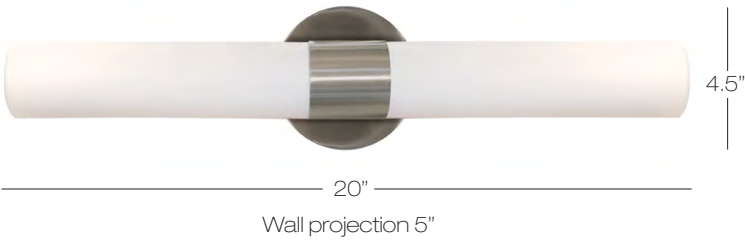

Shown:
CH522CRPNRT4B



Kilo Retro

Elegant crystal globe surrounding classic retro lamping options with beautiful polished nickel metal accents.

You have the option of a single medium base socket or a 3 light cluster of medium base sockets.

We offer a beautiful polished nickel canopy, glass cap, and chain standard. For cord hanging instead of chain(consult factory).

Select your lamp, we offer 40w Retro Edison Shape Filament, 30w Retro Tube Filament, and 40w Retro Tube Spiral Filament.

(Consult factory for custom chain lengths).



Chain single socket

Model
CH520

CR clear

Color Options	Finish	Lamp
CR	PN	RT3A

PN polished nickel

RT3A Medium Base Retro Filament Tube 30W

RT4B Medium Base Retro Filament Bulb 40W

RT4SA Medium Base Retro Spiral Tube 40W

Clear, Black, Brown, Dark Grey, Orange and Red Vintage Cloth cord available (consult factory).

Chain with 3 sockets

Model
CH522

CR clear

Color Options	Finish	Lamp
CR	PN	RT3A

PN polished nickel

RT3A Medium Base Retro Filament Tube 30W

RT4B Medium Base Retro Filament Bulb 40W

RT4SA Medium Base Retro Spiral Tube 40W

Clear, Black, Brown, Dark Grey, Orange and Red Vintage Cloth cord available (consult factory).



Cord color options
(consult factory).





Overall height : 15" minimum - 71" maximum

LED Cylinder

Powder coated white or anodized silver finish.
Custom color(consult factory).

LED wattage 14 watt , Citizen COB CLL-022
CCT: 3000 K
CRI : 85
Lumen output : 1000 lumens

Model
PD535

LED LED 2.8W Linear 3000K

Finish	Lamp	Mounting
WH	LED	M

SI silver
WH white
M monopoint canopy



Panels Suspension

Long panels of curved steel in white enamel finish. Hanging adjustable to 8 ft.
3 Stainless Steel cables field adjustable through Griplock system.

Model
CH517


CF26 Compact Fluorescent GU24 1x26W
GUL15 GU24 LED 15W
MB10 Medium Base Incandescent 100W

Finish	Lamp
WH	MB10

WH white



DIMENSIONS

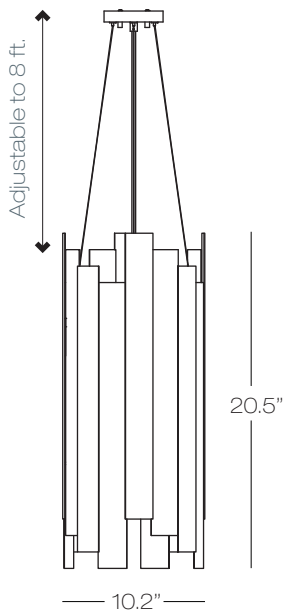



Alta Ceiling

Metal backplate with frosted opal glass diffuser. High Quality ceiling Luminaire. Polished Chrome decorative trim.

Unique backlight wall or ceiling wash.

Features

- High Quality steel and frosted opal glass.
- Beautiful shape, soft and comfortable light.
- High Quality and stable LED Chips, energy saving and Eco-friendly.
- No Hazardous materials such as Mercury and Lead, no IR and no UV.
- **LED DOB24** (DOB-Driver on Board 120v **90 CRI** 2000 Lumens). Fully Dimmable with ALL standard dimmers (Triac/Incand.,ELV, LVM)

Model
CL530

FR frost

Color Options

FR

PC

Finish

PC

MB4

Lamp

MB4


PC polished chrome

💡 **MB4** 3x40W Medium Base Incandescent

💡 **Q13** Compact Fluorescent Quad 2x13W



💡 **DOB24** LED DOB24 (DOB-Driver on Board) 120v 90 CRI 2000 Lumens

💡 **DOB10** LED DOB10 (DOB-Driver on Board) 120v 90 CRI 1000 Lumens

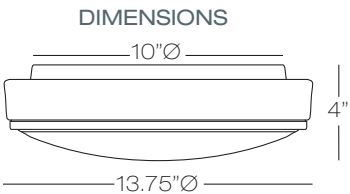

LAMPING DATA					
Lamp	Watts	Lumens	CCT	CRI	Aver. Life
DOB24	24	2000	3000K	>90	50,000 hrs
DOB10	10	1000	3000K	>90	30,000 hrs
Q13	13	600	2700K	>75	10,000 hrs
MB4	40	340	2700K	>75	1,000 hrs

Above info is per lamp. For accurate lumens, multiply by # of lamps in fixture.

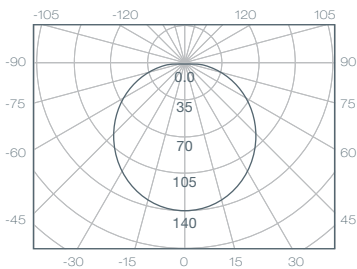

CL530FRPCQ13



Xylo Wall Clear



Xylo Wall Amber



Glass:
 Recycled Clear
 Recycled Dark Red
 with Clear edging,
 Recycled Yellow Amber
 with Clear edging.

Frame:
 Hand crafted
 Iron - bronze finish.

Xylo Pendant , Xylo Wall

Unique hand crafted iron frame pendant and wall sconce with Retro socket and black cloth covered cord, thick clear and colored glass panels hanging on top edge of frame.

Together they create a beautiful light pattern, a work of art.

Model

PD162

AM amber

CR clear

RD red

↔ RT6B E26 Retro Edison 60w

Color Options

Finish

Lamp

Cord

AM

BZ

RT6B

BL

BZ bronze

BL black

BN brown

GY grey

OR orange

RD red

Model

WS162

AM amber

CR clear

RD red

↔ RT6B E26 Retro Edison 60w

Color Options

Finish

Lamp



RD

BZ

RT6B

BZ bronze

DIMENSIONS

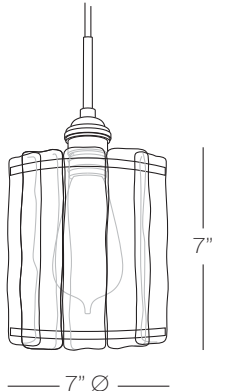




PC

Layla Wall

LED Wall Luminaire. Available in Polished Chrome or Satin Nickel faces with reflective white powder coated interior. Fully Dimmable.

LED Light Source
COB 5W Bridgelux
CCT 3000K
CRI 90
Light Output 435 lumens
Life 30,000 hours

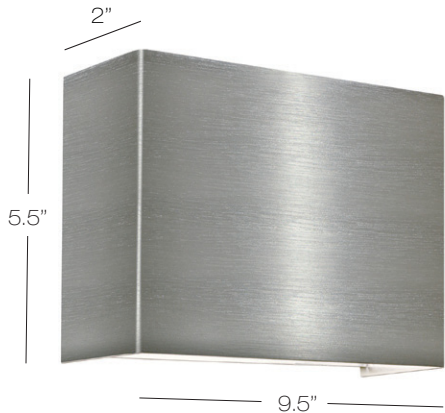

SN

Model
WS425

Finish
SN

PC polished chrome
SN satin nickel



Textile Fabric



Amber



Opal



Red



Mocha

Avenue Complete

Rectangular light box with Murano blown glass front panel and side panels. Each glass panel has a unique band of colorful Frits and genuine silver flakes. TF: textile fabric encased in frosted acrylic diffuser.


Model
WS233

Color Options		Finish	Lamp
OP		SN	Q18
AM amber			LA10 LED A10W
MO mocha			L5 LED G6.35 6W
OP opal			MC5 Minican 50W
RD red			Q18 Compact Fluorescent Quad 18W
TF textile fabric			DOB24 LED DOB24 (DOB-Driver on Board) 120v 90 CRI 2000 Lumens.

* **LED DOB24** (DOB-Driver on Board 120v **90 CRI** 2000 Lumens). Fully Dimmable with ALL standard dimmers (Triac/Incand.,ELV, LVM)

LAMPING DATA					
Lamp	Watts	Lumens	CCT	CRI	Aver. Life
DOB24	24	2000	3000K	> 90	50,000 hrs
LA10	10	840	3000K	>80	30,000 hrs
L5	6	330	3500K	>80	30,000 hrs
MC5	50	600	3000K	>75	2,000 hrs
Q18	18	1210	2700K	>75	10,000 hrs

Above info is per lamp. For accurate lumens, multiply by # of lamps in fixture.

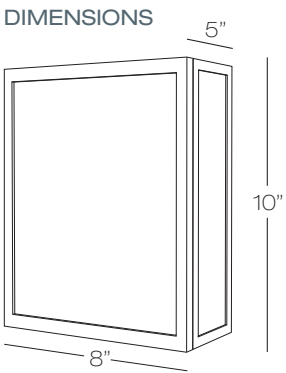

Zo Zo Wall


Linear Wall Washing LED Luminaire.
Plated steel construction, frosted white acrylic spread diffuser.

Dimmable with electronic low voltage dimmer.



Model WS163	
LED18 LED 18 watt	
Finish	Lamp
PC	LED18
SN satin nickel PC polished chrome	

DIMENSIONS

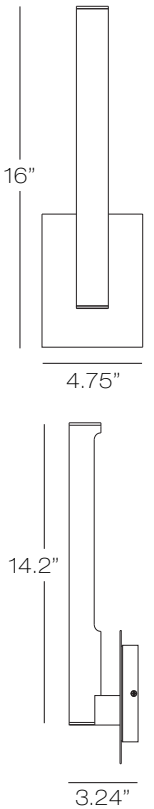

LAMPING DATA						
Lamp	Watts	Lumens	CCT	CRI	Beam Angle	Aver. Life
LED18	18	1000	3000K	90	120	35,000 hrs




Regis Suspension

Cased Opale Glass Cylinder.
12 V or 120 V options with coaxial cable or clear SVT cable.
12v offers choice of halogen or LED lamping
120v offers incandescent or compact fluorescent lamping

Model PD238		Regis 12V	
OP opal		L5 LED G6.35 6W X5 GY 6.35 Xenon 50W	
Color Options	Finish	Lamp	Mounting
OP	SN	L5	M
PN polished nickel SN satin nickel		M monopoint canopy R monorail adapter C cable adapter J EZ jack	

Model PD238		Regis 120V	
OP opal		MB6 Medium Base Incandescent 1x60W Q18 Compact Fluorescent Quad 1x18W Q26 Compact Fluorescent Quad 1x26W	
Color Options	Finish	Lamp	Mounting
OP	SN	Q18	M
PN polished nickel SN satin nickel		M monopoint canopy	

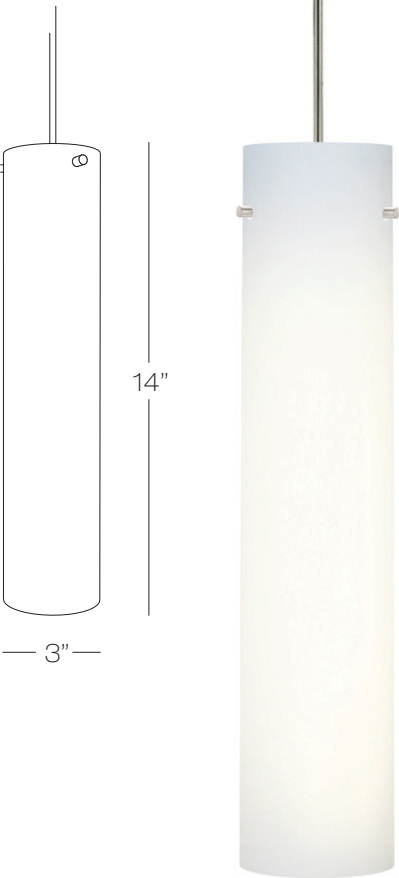


Regis Wall

Cased Opale Glass Cylinder on rectangular backplate.

Model WS237		Regis Wall 12V	
OP opal		CF26 Compact Fluorescent GU24 26W MB6 Tubular T10 E26 60W	
Color Options	Finish	Lamp	
OP	SN	CF26	
SN satin nickel			

Model WS238		Regis Wall 120V	
OP opal		CF26 Compact Fluorescent GU24 26W MB6 Tubular T10 E26 60W	
Color Options	Finish	Lamp	
OP	SN	CF26	
BZ bronze PN polished nickel SN satin nickel			

Model WS239		Regis Wall 12V	
OP opal		B18 Fluorescent 18W Biax	
Color Options	Finish	Lamp	
OP	SN	B18	
SN satin nickel			

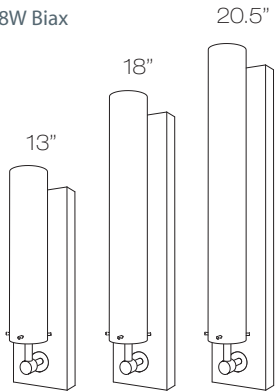

WS237 WS238 WS239






Bronze Down Light



White

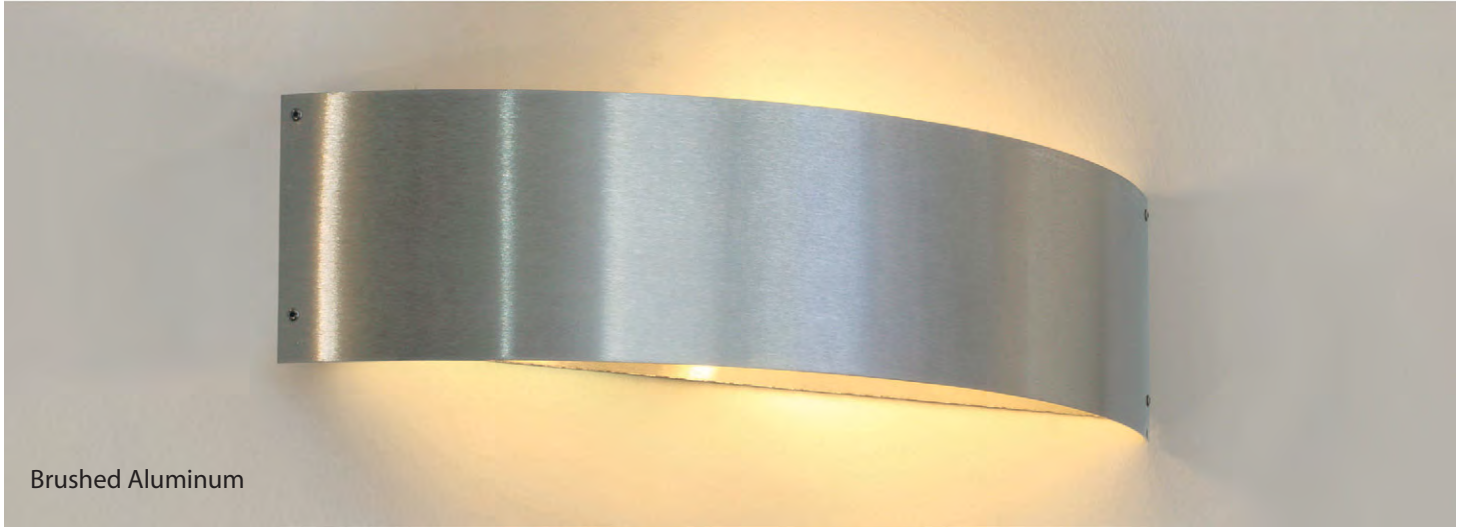

Brushed Aluminum

Echo Wide

Aluminum Indoor/Outdoor fixture ships with a set of (2) frosted acrylic diffusers and (1) matching solid aluminum shield.

For up and down light simply install both frosted acrylic diffusers. For down light only install aluminum shield on top and acrylic diffuser on bottom.

LED, Med. base LED A19 or CF18 Compact Fluorescent GU24 18W

LAMPING DATA					
Lamp	Watts	Lumens	CCT	CRI	Aver. Life
LA12	12	840	3000K	>85	30,000 hrs
CF18	18	1210	2700K	>70	10,000 hrs
DOB10	10	1000	3000K	>90	30,000 hrs

Model WO826		LA12 LED A12W CF18 Compact Fluorescent GU24 18W DOB10 LED DOB10 (DOB-Driver on Board) 120v 90 CRI 1000 Lumens.
Finish	Lamp	
BA	CF18	
BA brushed aluminum BZ bronze WH white		


Bronze



White



Brushed Aluminum

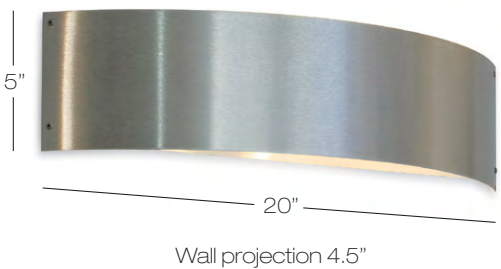

Echo Wall

Half cylinder exterior luminaire. Brushed Aluminum or Bronze exterior powder coated finish equipped with a galvanized outdoor rated E26 socket that will allow for Incandescent lampings or GU24 Spiral Fluorescent lamping with Incandescent adapter.

Model WO805		BA brushed aluminum BZ bronze
Finish	Lamp	
BZ*	MB10	
MB10 Base Incandescent 100W CF18 Compact Fluorescent GU24 18W		

*Consult factory for custom powder coated finishes

Bronze





LED Tape Generation 2

LED Tape-Generation 2

Stone Lighting’s Generation 2 Flexible LED Strip tape is superior to the competition because we offer AC/DC tape, we are offering you a tape that will work with any magnetic transformer or ANY no load electronic transformer. This makes it highly versatile and very user friendly.

It has a pin connection based system that prevents connection and conductivity problems. It is a very good quality white light with a high CRI index and high output light generation.

Below are some of the main features of our new and best to date tape:

- 3 watts per foot of length.
 - 12 LEDS per foot.
 - 200 Lumens per foot.
 - CRI >85
 - IP64
 - 3000K CCT (+ OR - 75) Very Tight Color Binning.
 - 50,000 hr life.
 - May be dimmed with Electronic Low Voltage (ELV) dimmers, when powered by electronic no-load transformer.
- Silicone cased tape with 3M adhesive backing Damp rated.
 - AC/DC may be powered by any magnetic transformer or ANY no load electronic transformer.
 - Power cable is 6 feet.
 - We stock the following lengths of tape so you don't have to worry about cutting tape:
 - Interconnect cables in 3", 12", 72".



ITEM	VOLTS	LENGHT
LEDTPWW1204	12v	4" Long
LEDTPWW2404	24v	4" Long
LEDTPWW1212	12v	12" Long
LEDTPWW2412	24v	12" Long
LEDTPWW1260	12v	60" Long
LEDTPWW2460	24v	60" Long
LEDTPWW12192	12v	16' Long
LEDTPWW24192	24v	16' Long

CCT= 3000K, 3W per foot length, Lumens per foot= 200 ,CRI = >85

ITEM	VOLTS	WATT
PWPLGIN12302	12v	30W
PWPLGIN24302	24v	30W
PWPLGIN12602	12v	60W
PWPLGIN24602	24v	60W

No Load Plugin Transformer for LED Tape

ITEM	VOLTS	WATT
PWTP121002	12v	100W
PWTP241002	24v	100W

No Load Remote Transformer for LED Tape

ITEM	
LEDPWRCNN6	72" Power Supply Wire with Female Connector

ITEM	DESCRIPTION
LEDTPCONLW	LED Tape 2 Way L-Connector
LEDTPCONXW	LED Tape 4 Way X-Connector
LEDTPCONTW	LED Tape 3 Way T-Connector
LEDTPENDCONW	LED Tape End Cap
LEDTPJNR	LED Tape Male-Male Pin Connector
LEDTPJNRCBL3W	LED Tape 3" Flexible Conn.Wire
LEDTPJNRCBL12W	LED Tape 12" Flexible Conn.Wire
LEDTPJNRCBL72W	LED Tape 72" Flexible Conn.Wire
LEDTPMTGCLP	LED Tape Mounting Clip



X connector



L connector




T connector



End Cap



Joiner



LED 4"



LED 12"





Breeze Fans

Stone Lighting's Breeze Fan is the lighting industry's first low voltage fully functional and practical fan that is compatible with Monorail, Cable, and Monopoint installations.


Compatible with most low voltage systems that utilize a low voltage jack and port system commonly used by several other companies that offer Low Voltage Solutions.

Breeze is available in an elegant Satin Nickel finish. The fan has a 7" stem and is fully adjustable with 360 degree rotation and a 270 degree tilt.


Each Breeze Fan consumes 5 watts of power, so using a Stone Lighting No Load Transformer for any monopoint application allows for sleek recessing of the transformer in the electrical box.

The fans also work perfectly alongside any low voltage pendant or head on monorail or cable light applications.

On/Off Independent Switch Feature.
Each Fan can be independently turned off by rotating the handle counterclockwise 180 degrees approximately and turned back on by hand tightening the handle (turn clockwise until snug.)

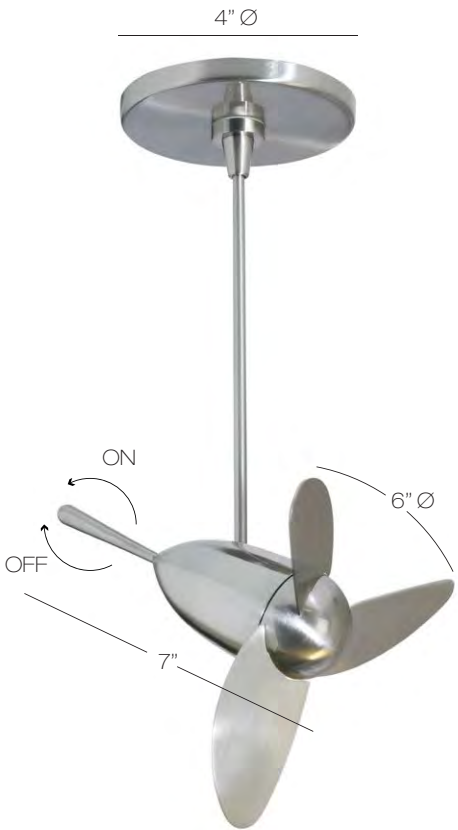

DIMENSIONS

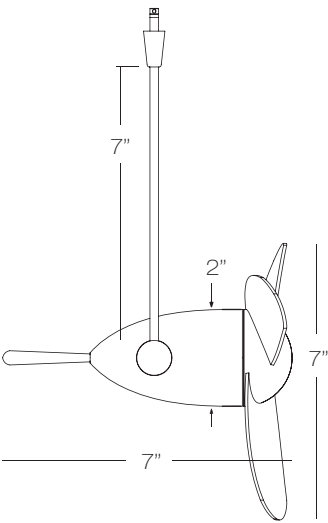


Model
FN007

Finish	07 7" stem Stem Length	Mounting
SN	07	M
SN satin nickel		M monopoint canopy R monorail adapter C cable adapter J EZ jack


BREEZE FAN IS A PATENT PENDING DESIGN ORIGINATED AND PROPERTY OF STONE LIGHTING.



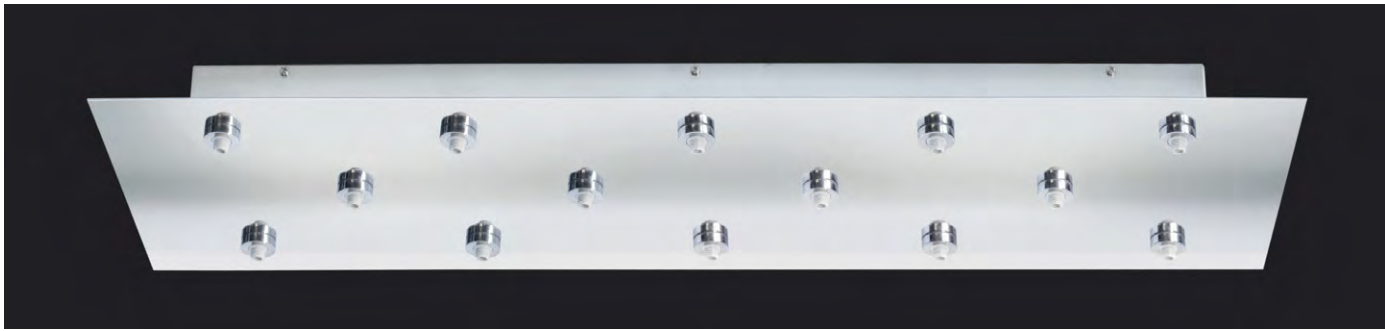

14 Light Modular Canopy

Our newest canopy innovation is modular in concept. Unparalleled in it's versatility, our new 14 light canopy offers the customer the ability to make a multitude of head or pendant placement variations and at the same time cover any unused and unsightly open ports. We have designed a simple half dome that covers up to 10 ports on the canopy. Simply screw on the half dome and decoratively cover a port if you desire. For example, if you want to change your 14 light canopy to a 10 light application simply cover any 4 ports you desire.

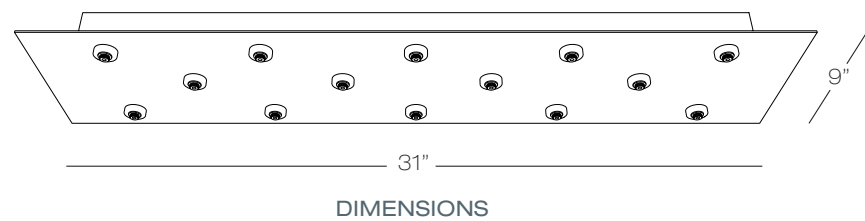


Model
CPEJRT14

HAL halogen lamp LED LED lamps	
Finish	Lamp
PC	LED
SN satin nickel PC polished chrome	



Decorative
Cover

See an example below of port being covered
in which you make a custom zig zag design placement.

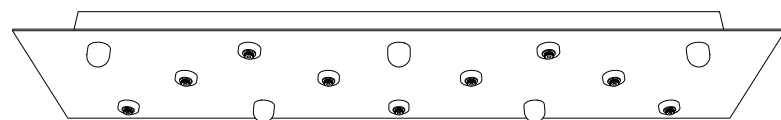

Powered by 2 x 150 watt electronic transformers you can go as low as only using 4 of the 14 ports.

We also can offer the canopy for LED applications.

Finally a solution for your customer that does not necessitate purchasing several different canopies when one will do the job of several!!!!



Shown:
CPEJRT3SNLED with
(3) PD223LTPCLEDJ LT.Topaz




3 Light Rectangular Canopy

3 Light EZ Jack Rectangular Canopy Mounts to
a standard 4" junction box.

Model
CPEJRT3

HAL halogen lamp LED LED lamps	
Finish	Lamp
SN	LED
SN satin nickel PC polished chrome	

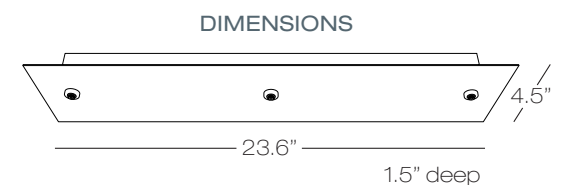



Stone Lighting's Cable Light System is now available in bronze. Perfect for large open space spanning installation, the cables virtually disappear when installed. Integrated low-voltage cables run parallel at 5.5" separation.

Virtually all pendants and heads are adaptable easily with our EZ Jack Cable Adapter. We also offer several other directly attached heads that are beautiful, unique and compatible with most of our glass and metal accessories.

DESIGN

Determine what you want to light and the design concept you are trying to create. You can choose from cable heads and pendants as outlined in our main book (pages 50-61) in satin nickel. In this section the same numerous and varied choices are shown in our beautiful new bronze plated finish.

Cable heads can be chosen from pages 62-63 and you may also choose compatible heads and pendants in bronze and satin nickel from pages 70-157 in the main Stone Lighting catalog. Simply attach any low voltage head or pendant to the Stone Lighting Cable System by specifying our Cable EZ Jack Adapter (see page 60).

Choose your decorative elements and attachable accessories in glass and metal shown in this section. (page 63)

SPECIFY CABLE LENGTH.

Cable Bare

Rated for 300W at 12V, 600W at 24V load: Voltage drops occur at 30' with 12V, and 60' with 24V.

CSCBLBAREBZ

#10 gauge tin-plated copper cable with Kevlar core.

SPECIFY BRONZE HARDWARE, CANOPIES AND TRANSFORMERS.

Universal Turnbuckles (2pc. set)

1 set (min) per cable run needed or use 2 sets for tightening cables at both ends. When ceiling mounted, cables drop 2.5" from ceiling. All turnbuckles include mounting hardware for drywall. Special hardware is available for brick, cement or plaster surfaces (specify when ordering).

Slimline Turnbuckles (2pc. set)

Slimline Turnbuckles tighten the cables and can be used for a cable run of 20 ft or less. They mount to wall or ceiling. When ceiling mounted, the cable is positioned 1 inch below the ceiling. Insulated version is required if mounting to metal (consult factory.)

Power Wall Anchors (2pc. set)

Comes as a pair of wall or ceiling anchors. These anchors can be used for feeding power or a set of dead wall anchors. To feed power, use a remote transformer (sold separately.)

CSCBLBARE(BZ,SN)



CSTRNBCKL(BZ,SN)



CSSLTRNBKL(BZ,SN)



CSWALANC(BZ,SN)



CSCBLADJ12BZ



Adjustable Cable Hanger 12ft

Used to support runs over 20' long so cable does not sag. Wire grip allows easy adjustability.

CSCBLADJ12BZ

CSEJADPBZ



Cable EZ Jack Adapter

Allows any EZ Jack element. Head or Pendant to mount and hang from cable run.

CSEJADPBZ

Conductive Connector (2pc.set)

Connectors join cables end to end to continue conductivity.

CSCNSBZ



CSCNSBZ

Isolating Connector (2pc.set)

Connectors join cables end to end and isolate power feeds from each other.

CSCNISO



CSCNISO

Surface Mounted Transformers

SMT	DESCRIPTION	MODEL NUMBER	INPUT	OUTPUT	DIMMERTYPE
	12V/300W Surface Mount Cable Transformer 30" Power feed cable	PWECBL300ABZ	1x120 VAC/2.5A	1x300W 12VAC LED / HAL	Electronic Low Voltage Dimmer
	12V/60W 4" Surface Mount Cable Transformer 30" Power feed cable	PWECBL60BZLED	1x120 VAC/0.50A	1x60W 12VAC LED / HAL	Electronic Low Voltage Dimmer

Single Feed Remote Canopies


	CSCPRIGBZ 4" Round power feed canopy 20" single feed rigid connector		CSCPSFTBZ 4" Round power feed canopy 30" single feed soft feeder connector
---	--	--	--

Dual Feed Remote Canopies

	CSCPRIGDUBZ 4" Round power feed canopy 20" dual feed rigid connector for 600W remote transformer		CSCPSFTDUBZ 4" Round power feed canopy 30" dual feed soft feeder connector
---	--	--	--

Remote Transformers

REMOTE TRANSFORMER	DESCRIPTION	DIMENSIONS LxWxH (in)	MODEL NUMBER	DIMMERTYPE
	Jbox Electronic 60W 120V 0.50Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	2.2"x1.3"x0.82"	PWE60NL	Electronic Low Voltage Dimmer
	Remote Electronic 60W 120V 0.50Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	8.15"x2"x1.70"	PWERM60LED	Electronic Low Voltage Dimmer
	Remote Electronic 150W 120V 1.25 Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	9.2"x3.4"x1.70"	PWERM150LED	Electronic Low Voltage Dimmer
	Remote Electronic 300W 120V 2.5 Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	9.2"x3.4"x1.70"	PWERM300LED	Electronic Low Voltage Dimmer
	Remote Magnetic 150W 120V 1.25Amp Multitap Output 12V, 13V, 14V, 15V 12.5Amp UL2108 Short circuit and thermal protection * 277V available upon request	8.75"x4.33"x3.82"	PWMRM150	LVM Dimmer
	Remote Magnetic 300W 120V 2.5Amp Multitap Output 12V, 13V, 14V, 15V 25Amp UL2108 Short circuit and thermal protection * 277V available upon request	8.75"x4.33"x3.82"	PWMRM300	LVM Dimmer
	Remote Magnetic 600W 120V 5Amp Dual Multitap Output 12V, 13V, 14V, 15V dual 25Amp UL2108 Short circuit and thermal protection * 277V available upon request	9.52"x5.31"x4.84"	PWMRM600	LVM Dimmer

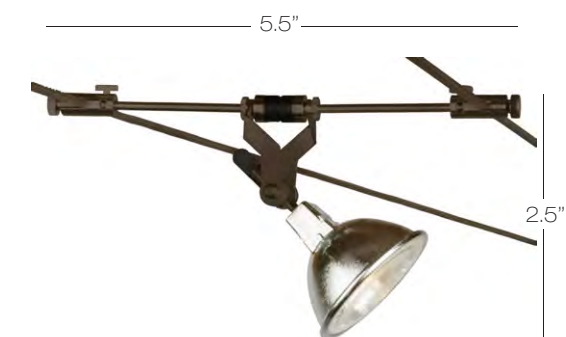

Decorative Elements

Aspen Head

Highly adjustable head tilts 140° within ring.
Ring will rotate 360°.
Can be accessorized with elements on next page.

Model
CB903

⚡

D5 LED MR16 5W

⚡

M5 MR16 Halogen 50W

Finish	Lamp	Mounting
BZ	M5	C

BZ bronzeC cable adapter

Snowmass EZ Jack Head

Head rotates 360°, swivels 220°, pivots on horizontal and vertical axis.
Can be accessorized with elements on next page.

Model
CB902

⚡

D5 LED MR16 5W

⚡

M5 MR16 Halogen 50W

Finish	Lamp	Mounting
BZ	M5	C

BZ bronzeC cable adapter

Vail Pivot Head

Head swivels 220°, pivots on horizontal and vertical axis.
Can be accessorized with elements on next page.

Model
CB900

⚡

D5 LED MR16 5W

⚡

M5 MR16 Halogen 50W

Finish	Lamp	Mounting
BZ	M5	C

BZ bronzeC cable adapter

Whistler Head

Head pivots 220° on two axis, field cuttable rods.
Can be accessorized with elements below.

Model
CB901

⚡

D5 LED MR16 5W

⚡

M5 MR16 Halogen 50W

Finish	Lamp	Mounting
BZ	M5	C

BZ bronzeC cable adapter

Cable Head Top

Borosilicate glass tube in frost or amber meant to hang on vertical or horizontally mounted cable runs.

Model
CB507

AM amber

FR frost

⚡



L2 LED G4 JC 2W

⚡

X3 GY6.35 Xenon 35W

Color	Finish	Lamp	Mounting
AM	BZ	X3	C

BZ bronzeC cable adapter

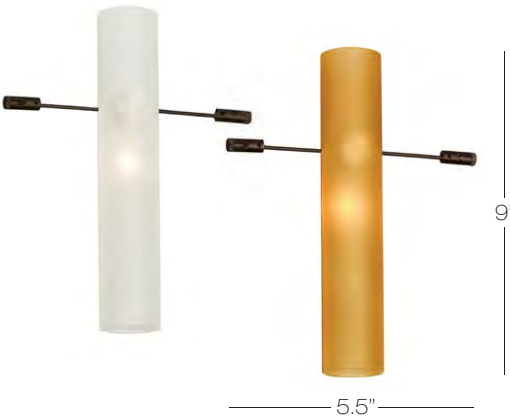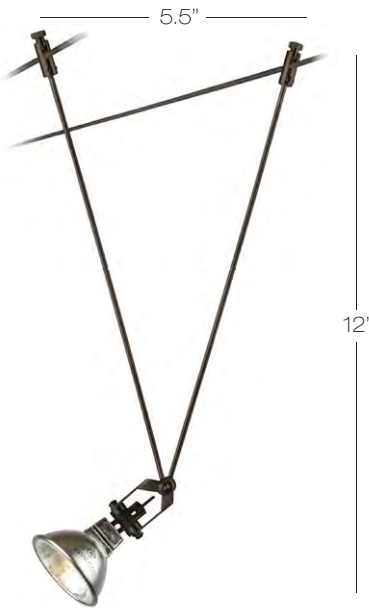

Each element easily attaches with a simple spring clip. (included)

SORAA VIVID 2 - SNAP COMPATIBLE

Soraa Vivid 2 MR16 lamps feature a 10 degree beam with choice of 2700K, 3000K or 5,000 color temperatures. Soraa lamps are a halogen replacement and 80% more energy efficient than standard halogen lamps. Lifetime of 35,000 hours. Works with magnetic and electronic transformers and dimmers. Add the optional Optical Accessories below to fine tune lighting. All accessories are magnetic self-centering and fit all fixtures.

SORAA 2700K LAMPS

10 degree beam, 2700K, 4300 CBCP, 8 Watt, 12VAC, 95CRI; LED retrofit lamp to replace 12VAC 40W halogen MR16 lamps for use in indoor and outdoor applications. Suitable for enclosed fixtures. UL and CUL listed for use with 12VNEC Class 1 and Class 2 Systems.

SORAA 3000K LAMPS

10 degree beam, 3000K, 4500 CBCP, 8 Watt, 12VAC, 95CRI; LED retrofit lamp to replace 12VAC 40W halogen MR16 lamps for use in indoor and outdoor applications. Suitable for enclosed fixtures. UL and CUL listed for use with 12VNEC Class 1 and Class 2 Systems.

SORAA 5000K LAMPS

10 degree beam, 5000K, 5180 CBCP, 8 Watt, 12VAC, 95CRI; LED retrofit lamp to replace 12VAC 40W halogen MR16 lamps for use in indoor and outdoor applications. Suitable for enclosed fixtures. UL and CUL listed for use with 12VNEC Class 1 and Class 2 Systems.

SORAA OPTICAL ACCESSORIES - OPTIONAL



Beam Spreader
Use in an application when you desire to modify the beam spread of your lamp. We offer 25°, 36° and 60° options.

Beam	Part Number
25°	AC-GC-2525
36°	AC-GC-3636
60°	AC-GC-6060



Linear Lens
Use in wall washes and illuminating asymmetric objects.

Beam	Part Number
10° – 25°	AC-GE-1025-00
10° – 36°	AC-GE-1036-00



Louvers
Eliminates high angle glare, making light beams disappear in downlight applications.

Cutoff Angle	Part Number
40°	AC-LU-4040-00-00



CCT Shifter
Use in any application where you desire to modify the color temperature of your lamp. Create custom colors for festive occasions or brand identity. Single Lamp SKU can be used for multiple color temperatures.


CTO*	Part Number
1/4 CTO	AC-CC-0001-00
1/2 CTO	AC-CC-0002-00
3/4 CTO	AC-CC-0003-00



SORAA VIVID 2

For applications that require very high light output from tiny form factors these lamps deliver unprecedented performance and light quality. Soraa lamps emit perfect spectrum of light, and have a CRI of 95. We are proud to offer Soraa’s top 10 lamps which are sure to meet your lighting needs.

Model	Description	CRI	Lumens
00223	MR16 Vivid 2 9.8W 2700 25 degrees	95	400
00275	MR16 Vivid 2 9.8W 2700 36 degrees	95	400
00229	MR16 Vivid 2 9.8W 3000 25 degrees	95	420
00273	MR16 Vivid 2 9.8W 3000 36 degrees	95	420
00271	MR16 Vivid 2 10W 2700K 10 degrees *SNAP LAMP	95	400
00247	MR16 Vivid 2 11.5W 2700 25 degrees	95	460
00255	MR16 Vivid 2 11.5W 2700 36 degrees	95	460
00269	MR16 Vivid 2 10W 3000K 10 degrees *SNAP LAMP	95	420
00245	MR16 Vivid 2 11.5W 3000 25 degrees	95	480
00253	MR16 Vivid 2 11.5W 3000 36 degrees	95	480

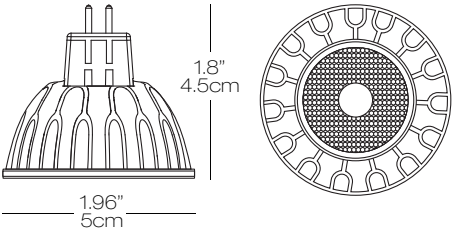

Product Name	Bulb	Model	Description	Av. rated Life	Color Temp.	Lumens
12 VOLT HALOGEN & XENON						
12 Volt Halogen Bi-Pin		LMPX1CR	12v 10W G4 Halogen Bipin Clear	2,000	2900k	120
		LMPX2CR	12v 20W G4 Super 5K Xenon Bipin Clear	5,000	2900K	350
		LMPX2FR	12v 20W G4 Super 5K Xenon Bipin Frost	5,000	2900K	330
		LMPX3CR	12v 35W G6.35 Super 5K Xenon Bipin Clear	5,000	2900K	700
		LMPX3FR	12v 35W G6.35 Super 5K Xenon Bipin Frost	5,000	2900K	650
		LMPX5CR	12v 50W G6.35 Super 5K Xenon Bipin Clear	5,000	2900K	1100
		LMPX5FR	12v 50W G6.35 Super 5K Xenon Bipin Frost	5,000	2900K	1050
		LMPX2FR10K	12v 20W G4 Xenon Bipin Ultra 10K Frost	10,000	2900k	330
		LMPX3CR10K	12v 35W G6.35 Xenon Bipin Ultra 10K Clear	10,000	2900k	700
		LMPX3FR10K	12v 35W G6.35 Xenon Bipin Ultra 10K Frost	5,000	3000k	650
		LMPX5FR10K	12v 50W G6.35 Xenon Bipin Ultra 10K	5,000	3000k	1100
12 Volt Halogen MR11		LMPN3N	12v 35W MR11 Super 5K Bipin Narrow Flood FTF-P	5,000	3000k	3600
12 Volt Halogen MR16 Bipin Lamp		LMPM2	12v 20W MR16	5,000	3000K	1100
		LMPM3M	12v 35W MR16 Super 5K Medium Flood FMW-P Dichroic	5,000	3000K	1600
		LMPM3MCC	12v 35W MR16 Super 5K Medium Flood FMWAlu Constant Color	5,000	3000K	1600
		LMPM5M	12v 50W MR16 Super 5K Medium Flood EXN/L	5,000	3000K	2200
		LMPM5MCC	12v 50W MR16 Super 5K Medium Flood EXZ Alu Constant Color	5,000	3000K	2200
		LMPM5N10K	12v 50W MR16 Ultra 10K EXN/10M Dichroic	10,000	3000K	2200
		LMPM5WFR	12v 50W MR16 Super 5K EXN Wide Beam Decor Frosted Back	5,000	3000K	1600
		12 VOLT LED				
12 Volt LED MR11		LMPND3	12v 3w MR11 LED 3000K	25,000	3000k	150
		LMPND3C	12v 3w MR11 LED 2700K	25,000	2700k	150
12 Volt LED MR16		LMPD5	12v 5w LED MR16 2700K 38 Degree AC	35,000	2700k	380
		LMPD6	12v 6w Dimable LED MR16 2700K 38 Degree AC	35,000	2700k	420
12 Volt LED Bi-Pin		LMPL2WW	12v 2W LED G4 JC 2900K	25,000	2900k	120
12 Volt LED Bi-Pin w/ Downlight		LMPL5N	12v 6w LED Bi-pin Lamp 3500K	40,000	3500k	300
		LMPL5W	12v 6w LED Bi-pin Lamp 2700K	40,000	2700k	300
120 VOLT HALOGEN						
120 Volt Halogen Mini-Can		LMPMC5	120v 50W Mini-Can E11 120V Clear	2,000	2900k	1000
		LMPMC75	120v 75W Mini-Can E11 120V Clear	2,000	2900k	1200
		LMPMC15	120v 150W Mini-Can E11 120V Clear	2,000	2900k	2500
120 Volt Halogen G9		LMPG975CR	120v 75w G9 120v Clear	2,000	2900k	1050
		LMPG975FR	120v 75w G9 120v Frosted	2,000	2900k	1000
120 Volt Halogen GU10		LMPGM5	120v 50w GU10 MR16 Halogen	2,000	3000k	2200
120 VOLT FLUORESCENT						
120v Compact Fluorescent 4 Pin		LMPQ13W	120v 13W Compact Fluorescent FLD/E 2700K Base G24q1	12,000	2700k	900
		LMPQ13N	120v 13W Compact Fluorescent FLD/E 3500K Base G24q1	12,000	3500k	900
		LMPQ18W	120v 18W Compact Fluorescent FLD/E 2700K Base G24q2	12,000	2700k	1200
		LMPQ18N	120v 18W Compact Fluorescent FLD/E 3500K Base G24q2	12,000	3500k	1200
		LMPQ26W	120v 26W Compact Fluorescent FLD/E 2700K Base G24q3	12,000	2700k	1800
		LMPQ26N	120v 26W Compact Fluorescent FLD/E 3500K Base G24q3	12,000	3500k	1800
		LMPQ32W	120v 32W Compact Fluorescent FLD/E 2700K Base G24q3	12,000	2700k	2400
		LMPQ32N	120v 32W Compact Fluorescent FLD/E 3500K Base G24q3	12,000	3500k	2400
120v Compact Fluorescent GU24		LMPCF13GW	120v 13W Compact Fluorescent GU24 Base 2700K	10,000	2700k	800
		LMPCF13GN	120v 13W Compact Fluorescent GU24 Base 3500K	10,000	3500k	800
		LMPCF18GW	120v 18W Compact Fluorescent GU24 Base 2700K	10,000	2700k	1200
		LMPCF18GN	120v 18W Compact Fluorescent GU24 Base 3500K	10,000	3500k	1200
		LMPCF26GW	120v 26W Compact Fluorescent GU24 Base 2700K	10,000	2700k	1750
		LMPCF26GN	120v 26W Compact Fluorescent GU24 Base 3500K	10,000	3500k	1750
120 VOLT RETRO LAMPS						
120v Retro Lamps		LMPRT3A	120v 30w Retro Tube Filament 185mm T9 E26	3,000	-	95
		LMPRT4C	120v 40w Retro Tube Filament 300mm T9 E26	3,000	-	165
		LMPRT6C	120v 60w Retro Tube Filament 300mm T9 E26	3,000	-	200
		LMPRT4SA	120v 40w Retro Tube Spiral Filament 185mm T9 E26	3,000	-	100
LMPRT4SC		120v 40w Retro Tube Spiral Filament 300mm T8 E26	3,000	-	135	
		LMPRT6B	120v 60w Edison Shape Retro Lamp E26	3,000	-	200
120 VOLT LED LAMPS						
120v LED G9		LMPG94	120v 3.8w LED G9 WW 3000K	30,000	3000k	300
		LMPG93	120v 2.0w LED G9 WW 3000K	30,000	3000k	150
120v LED A19		LMPLA10	120v 10w Dimmable LED A19 840 Lumens 2700K	30,000	2700k	600
120v LED GU10		LMPGB6	120v 6w LED GU10 3000K 38 Deg MR16	50,000	3000k	300
120v LED GU10 Dimable		LMPGB6D	120v 6w Dimable LED GU10 3000K MR16	50,000	3000k	300



Phone: (312) 240-0400
Fax: (866) 300-9283

info@stonelighting.net

stonelighting.net