

3,5,7 & 13 Light EZ Jack Canopy


stone
LIGHTING

This product is suitable for indoor dry locations only.
This product can be dimmed with an ELV dimmer only.
This instruction is for the following models:




- 3 Light Canopy - (CPEJRN3)
- 5 Light Canopy - (CPEJRN5)
- 7 Light Canopy - (CPEJRN7)
- 13 Light Canopy - (CPEJRN13)


CAUTION: Assembled chandelier is heavy! Blocking (ceiling reinforcements) and/or additional hardware not supplied with this canopy may be necessary for safe mounting.

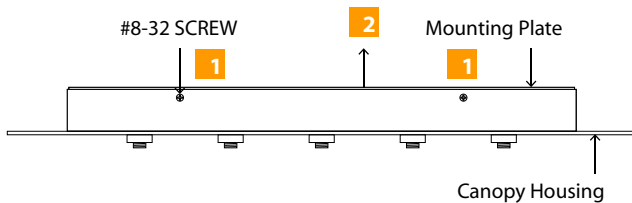


- 1 Remove the #8-32 screws on the sides of the canopy housing.
- 2 Lift the mounting plate from the canopy housing.

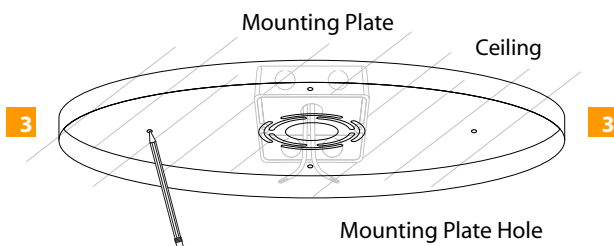


- 3 Align the mounting plate holes with the electrical box holes and mark four points onto the ceiling through the mounting holes.

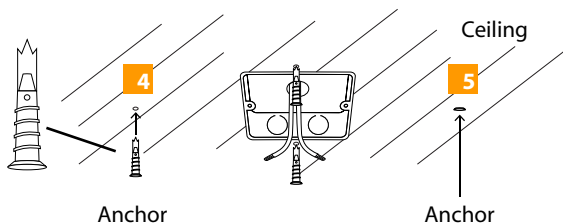


- 4 With a hammer tap the anchors at the marked points into the ceiling up to the threaded portion.
- 5 Screw the anchors in the rest of the way with a Phillips screwdriver.

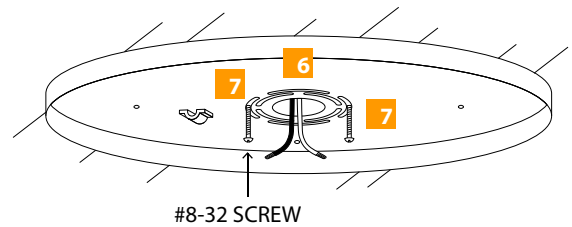


- 6 Feed the power line wires through the mounting plate center hole.
- 7 Line up the two mounting plate slots with the electrical box holes and use the two provided #8-32 screws to mount it to the electrical box.

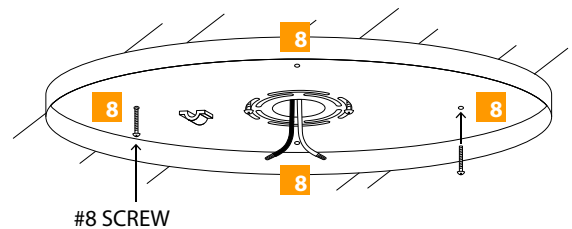


- 8 Secure the mounting plate to the anchors with the 4 provided #8 screws.

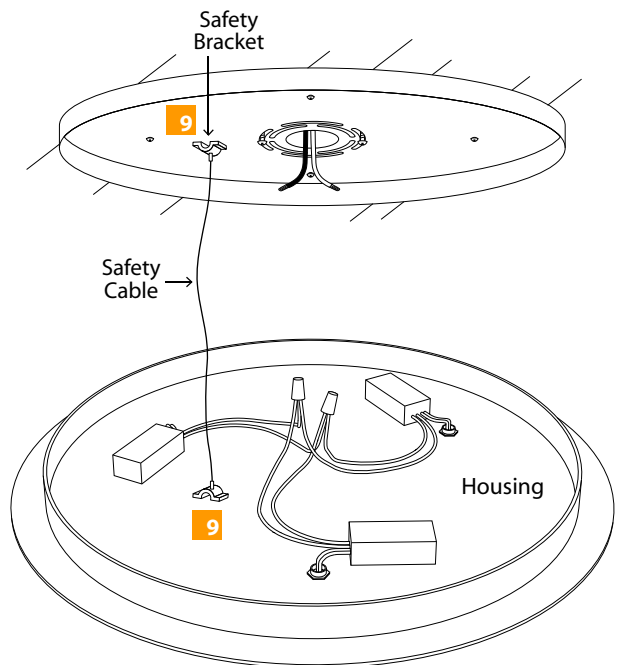


- 9 Insert one end of the safety cable into the mounting plate safety bracket and insert the other end into the housing safety bracket.

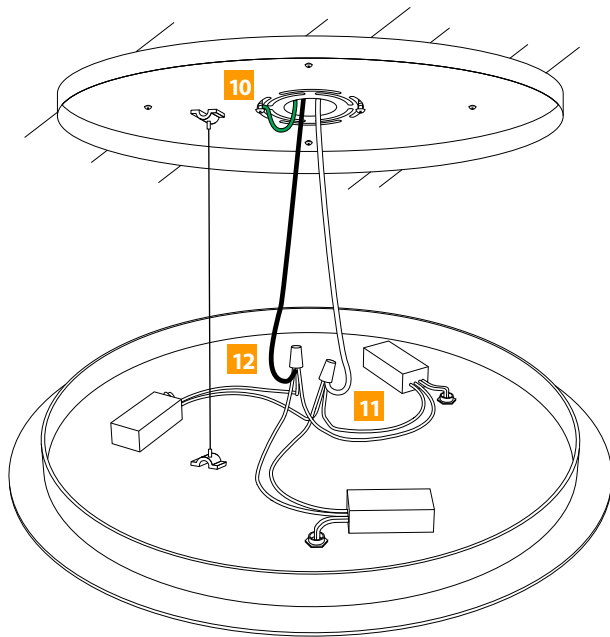

- 10** Make sure the mounting plate is grounded in accordance with local electrical codes.
- 11** Connect the housing white wire to the neutral power line wire with a wire nut.
- 12** Connect the housing black wire to the hot power line wire with a wire nut.
- 13** Place all wires and wire nut connections properly inside the housing.

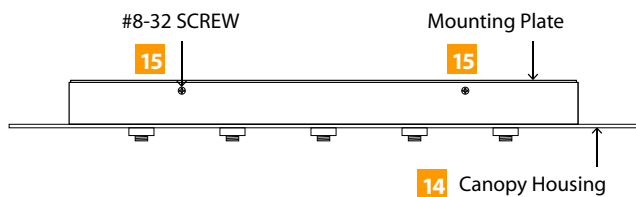

- 14** Slide the housing onto the mounting plate and line up the housing holes with the mounting plate holes.
- 15** Replace and tighten the #8-32 screws to secure the housing in place.

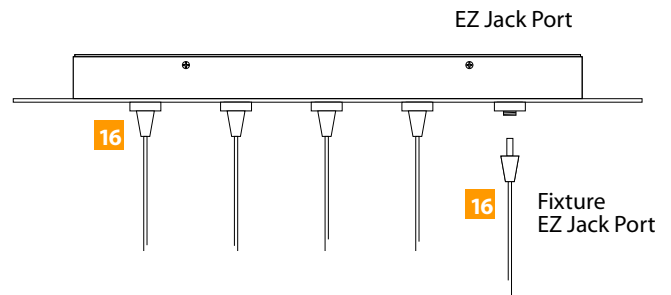

- 16** Screw each fixture EZ Jack completely into the EZ Jack port.
- 17** Turn the power on.