





Design Inspirations by STONE LIGHTING

How to Buy Stone Lighting Products

Just visit: stonelighting.net you will find information such as: Sales Representatives, Showrooms, on-line Catalog and more.



Light fixtures and lighting systems by Stone Lighting bear the ETL mark, giving assurance that the products are compliant with safety standards, having been tested and certified by Intertek, a nationally recognized testing laboratory.







Dazzle Collection

Beaux Arts Collection 14 - 17 Retro Collection 18 - 20 21 22 - 23 24 - 25 26 - 29 30 - 33 34 - 35 36 37 38 - 39 40 41 42 - 43 Xylo Series 44 - 45

4 - 13

50 - 51 Echo Series LED Tape Generation 2 52 - 53 Breeze Fans 54 - 55 14 Light Modular Canopy 56 3 Light Rectangular Canopy Bronze Cable Light System

Layla Wall

Zo Zo Wall

Regis Wall

Avenue Wall

46

47

48

49

58 - 63

Soraa 64 Lamp Guide 65



















Design Inspirations by STONE LIGHTING





Spaga

Visually Artistic, each shade uniquely combined into a creation of tight curves and squiggles.

Model PD531

Model

PD531

Spaga 12V

GO gold SI silver ■ **L2** LED G4 JC 2W
■ **X3** GY6.35 Xenon 35W Color Options Finish Lamp

SI SN BZ bronze PG polished gold PN polished nickel SN satin nickel M monopoint canopy
R monorail adapter
C cable adapter
J EZ jack

Spaga 120V


GO gold SI silver **G975** G9 75W 120V **ID93** LED G9 2W GO

BZ LG93

BZ bronze PG polished gold PN polished nickel SN satin nickel

M monopoint canopy



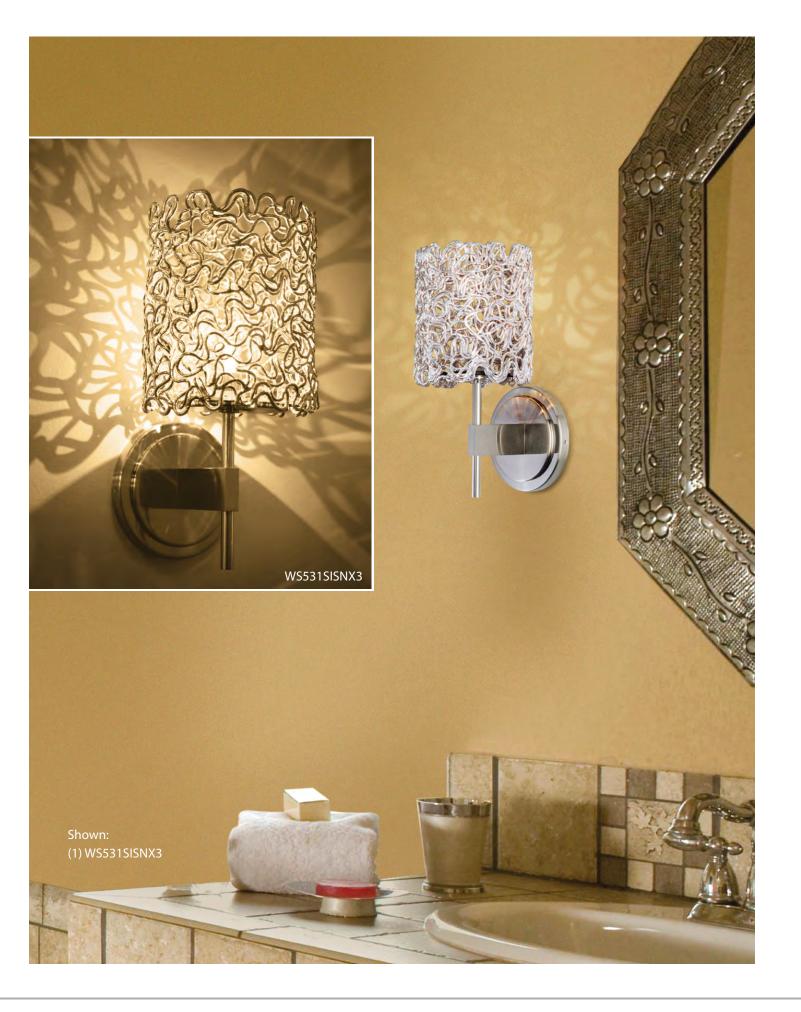





Spaga

Visually Artistic, each shade uniquely combined into a creation of tight curves and squiggles.

Model Spaga Wall WS531

GO gold
SI silver

Color Options
SI

BZ bronze

L2 LED G4 JC 2W
X3 GY6.35 Xenon 35W

Lamp
X3

BZ bronze PG polished gold PN polished nickel SN satin nickel

Model Spaga Cei

Spaga Ceiling 20"

GO gold
SI silver

GO gold
SI silver

GO gold
SI silver

GO gold
COlor Options

GO gold
COl

*(3-Medium Base Sockets)

*(3-Medium Base Sockets)

BZ bronze
PG polished gold
PN polished nickel
SN satin nickel



Spaga Ceiling 10"

GO gold
SI silver

Color Options

GCF13 Compact Fluorescent GU24 13W
LA10 LED A19 10W
RT6B Medium Base Retro Filament Bulb 60W
Lamp*

Color Options Finish Lamp*
SI SN CF13

BZ bronze PG polished gold PN polished nickel SN satin nickel



Frosted acrylic diffuser to evenly diffuse light.





SPAGA • Ceiling - Pendant - Wall





Coil Long Pendant

Solid brass and copper bands stacked and combined creatively into a long thin cylinder.

Coil Long 12V

GO gold SI silver ■■ **L2** LED G4 JC 2W ■ **X3** GY6.35 Xenon 35W Color Options Finish

BZ GO BZ bronze
PG polished gold M monopoint canopy R monorail adapter PN polished nickel SN satin nickel C cable adapter
J EZ jack

Coil Long 120V

GO gold SI silver **G975** G9 75W 120V **IG93** LED G9 2W Color Options Finish SI

SN **LG93** M monopoint canopy

BZ bronze PG polished gold PN polished nickel **SN** satin nickel

COIL LONG • Pendant - Wall





Coil Short

Solid brass and copper bands stacked and combined creatively into a short wide cylinder.

PD537

Model Coil Short 12V

Color Options		Lamp	Mounting
SI silver		• X3 GY6.35 X	
GO gold	=(100	L2 LED G4.	JC 2W

BZ bronze PG polished gold PN polished nickel SN satin nickel M monopoint canopy
R monorail adapter
C cable adapter
J EZ jack



Coil Short 120V

BZ bronze
PG polished gold
PN polished nickel
SN satin nickel M monopoint canopy



Coil Short Wall

GO gold SI silver ■ **L2** LED G4 JC 2W ■ **X3** GY6.35 Xenon 35W

Color Options	Finish	Lamp
GO	BZ	Х3
	BZ bronze	

PG polished gold PN polished nickel SN satin nickel





c CINCO US





Model PD536

Model PD536

Kurly 12V

GO gold **SI** silver ■■ **L2** LED G4 JC 2W ■ **X3** GY6.35 Xenon 35W Color Options Finish

GO PG Х3 M

BZ bronze PG polished gold PN polished nickel SN satin nickel M monopoint canopy
R monorail adapter
C cable adapter
J EZ jack

Kurly 120V

GO gold SI silver **G975** G9 75W 120V **IIII LG93** LED G9 2W Color Options Finish

GO PG LG93 M

BZ bronze PG polished gold PN polished nickel SN satin nickel M monopoint canopy

Model WS536

Kurly Wall

GO gold SI silver

Color Options Finish GO PG Х3 BZ bronze PG polished gold

PN polished nickel **SN** satin nickel

Kurly


Curled brass and copper spheres characterized by intricate silver or gold interior small spheres.

Layered by alternate polished gold or silver larger outer layer.








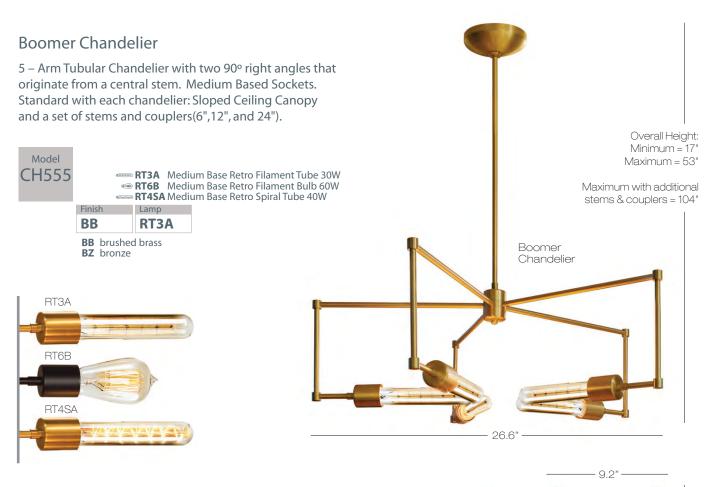

Stilt Chandelier

7 - Arm Tubular Chandelier.

6 - arms symmetrically split plus one central arm. Medium base sockets standard with each chandelier. Sloped Ceiling Canopy and a set of stems and couplers (6",12", and 24").





2 – Split arm tubular Wall. Compliments Stilt Chandelier. Medium Based Sockets.



20.8" Stilt Chandelier Stilt Wall Wall projection

Overall Height: Minimum = 28" Maximum = 64" Diameter = 23" Maximum with additional stems & couplers = 115"

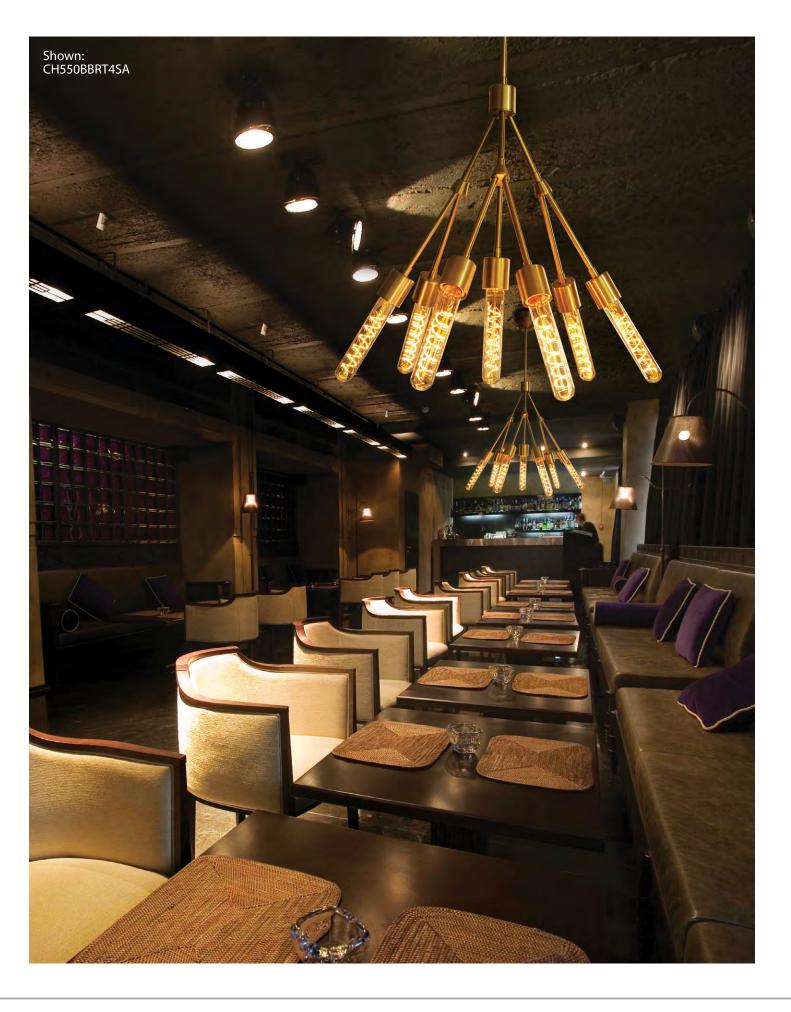

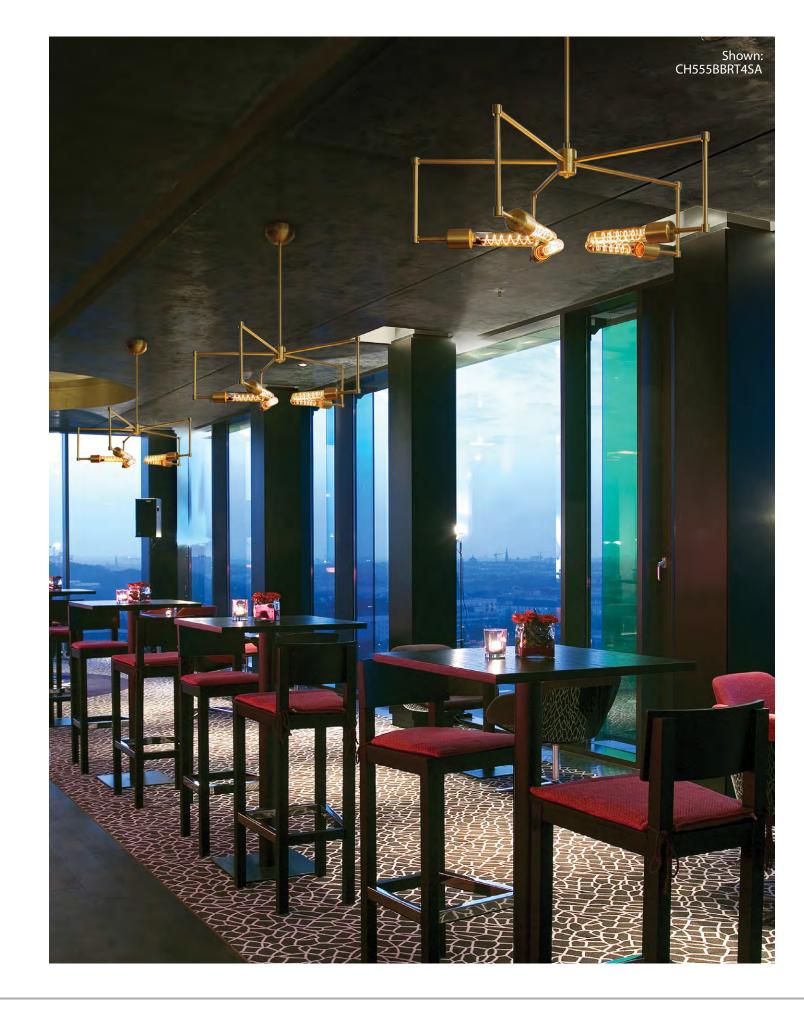





Model No.	Color	Mesh	Finish	Braided Cord	Lamp
PD300	-	-	BZ, PN, SN	BL, BR, RD	-
PD301	-	-	BZ, PN, SN	BL, BR, RD	-
PD302	-	-	BZ, PN, SN	BL, BR, RD	-
PD310	-	-	BZ, PN, SN	BL, BR, RD	-
PD311	AM, CR,OP	-	BZ, PN, SN	BL, BR, RD	CF13, CF26, LA10, RT6B
PD312	-	-	BZ, PN, SN	BL, BR, RD	-
PD313	-	BZ, SI	BZ, PN, SN	BL, BR, RD	-
PD314	-	BZ, SI	BZ, PN, SN	BL, BR, RD	-
PD315	-	BZ, SI	BZ, PN, SN	BL, BR, RD	-

AM= amber, CR= clear, OP= opal, BZ= bronze, PN= polished nickel, SN= satin nickel, SI= silver, BL= black, BR= brown, RD= red.

A multitude of Multi-Light configurations is possible with every pendant shown. Complementary Wall Sconces can be found on pages 214-215 and Ceiling Fixtures on page 253 of Stone Lighting Catalog 40. For alternative lamp choices (LED and Fluorescent) Consult factory. All fixtures are provided with 8' of 3 wire UL listed cord.





LMPRT4SC Retro Spiral

T8 Tube Bulb 40 Watts / 120 volts Medium Brass Base. Spiral Filament, Dimmable. Average life 1,500 hours. Length 300mm



LMPRT4C Retro Bulb

T8 Tube Bulb 40 Watts / 120 volts Medium Brass Base. Dimmable. Average life 1,500 hours. Length 300mm



LMPRT4SA Retro Spiral

T9 Tube Bulb 40 Watts / 120 volts Medium Brass Base. Dimmable. Average life 1,500 hours. Length 185mm



LMPRT3A Retro Bulb

T9 Tube Bulb 30 Watts / 120 volts Medium Brass Base. Dimmable. Average life 3,000 hours. Length 185mm




LMPRT6B Edison

Edison Bulb 60 Watts /120 volts Medium Brass Base. Dimmable. Average life 3,000 hours.



LMPRT6C Retro Bulb

T10 Tube Bulb 60 Watts /120 volts Medium Brass Base Dimmable Average Life 1,500 hours Length 300mm

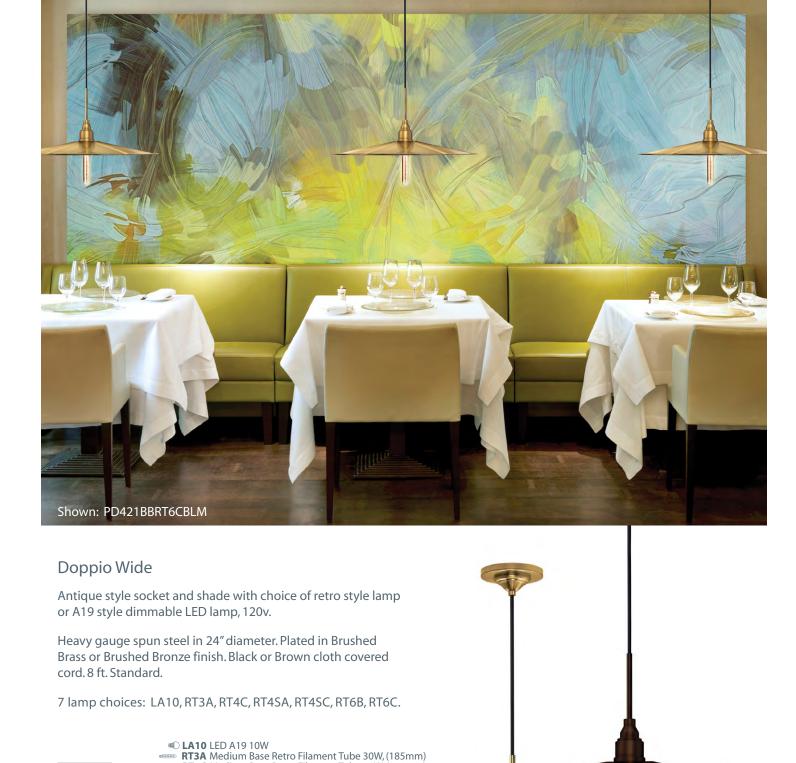



- RT4C Medium Base Retro Filament Tube 40W, (300mm)
- RT4SA Medium Base Retro Spiral Tube 40W, (185mm) RT4SC Medium Base Retro Spiral Tube 40W, (300mm)
- RT6B Medium Base Retro Filament Bulb 60W

BZ RT3A BL **BL** black **BB** brushed brass



M monopoint canopy



BZ brushed bronze

7.5"





Leena Chandelier

Organic curved canopy with (7) LED MR-16 lights that illuminate 20 pcs of mouth blown Amber and/or Clear scoop glass.


The glass hangs on 4 levels ranging from 14" to 22" overall length.

For double the overall hanging lengths (recommended for ceilings higher than 9'). Specify #CBL1628 Description: 4 sets of longer cables for 28" to 44" overall

hanging lengths.




	PC polish	ned chrome	
Color Options	Finish	Lamp	
AM	PC	LED	
AM ambe AMCR ambe CR clear		d D6 LED MR	16 6\











stonelighting.net 23





Cloud Suspension

Donut shaped satin cased opal glass suspension luminaire. Griplock cable height adjustable.

3 medium based sockets for incandescent or self ballasted screw in fluorescent lamping options.





CLOUD • Suspension 25



Gracie Collection

Pristine Leaded Crystal Glass Spheres. Offered in perfectly clear crystal and also with frosted interior lamp compartment.

Pristine unfrosted spheres throw an impressive clarity and glow, while frosted version softly diffuses lamp holder and lamp image while still offering a beautifully clear crystal sphere.



■■ **L2** LED G4 JC 2W ■ **X2** G4 Xenon 20W

Color Options	Finish	Lamp	Mounting	
CR	SN	X2	M	
	BZ bronze		M monopo	int canopy

R monorail adapter
C cable adapter
J EZ jack **PN** polished nickel SN satin nickel



Model PD092

Gracie Frost

L2 LED G4 JC 2W FR frosted X2 G4 Xenon 20W Color Options Finish FR SN X2 M

BZ bronze **M** monopoint canopy **PN** polished nickel **SN** satin nickel

R monorail adapter **C** cable adapter J EZ jack



Gracie Wall

Stone Lighting can offer Gracie Low Voltage Pendants in various wall mounted configurations.

All Gracie pendants can be mounted on Stone Lighting's Universal Low Voltage Adjustable Mounting Bracket (shown right).



Gracie Wall

CR clear **L2** LED G4 JC 2W FR frosted X2 G4 Xenon 20W FR PN **X2 BZ** bronze **PN** polished nickel

SN satin nickel









Stone Lighting now offers our 12v coaxial with a PVC white coating. White stem, white coaxial, and white monopoint canopies are standard when ordering PD093.

All other Stone Lighting Multi-Light canopies can also be powder coated in white upon custom request. (Consult factory)

Model	Gra
PD093	CG o
	Colord

acie White

cognac clear

■■ **L2** LED G4 JC 2W ■ **X2** G4 Xenon 20W frosted

FR WH X2 WH white

M monopoint canopyR monorail adapterC cable adapter



Gracie 25 Light Canopy

Mounts to a standard 4" junction box. Equipped with (3) 150 watt electronic transformers.



WH white







Gracie Ceiling

Crystal hemisphere with frosted lamp compartment creates a beautiful ceiling or wall luminaire. 12V Halogen or LED.









Jazz Crystal LED illuminated octagonal Swarovski Crystal Pendants.

Model	CR clear		■ LED 2.8W Linear 3000K		
PD223	Color Options	Finish	Lamp	Mounting	
	CR*	PC	LED	M	

PC polished chrome

- M monopoint canopy R monorail adapter C cable adapter J EZ jack





Blue AB Sapphire

Light Medium Topaz Sapphire

















Medium Rosaline Silver


* For any of the colored Swarovski crystals shown, indicate your choice and consult factory for availability and pricing.


	your enoise and consult decory for and	naomey and priemy.
Model	Description	
PD223GSPCLEDR PD223GTPCLEDR PD223CRPCLEDR	Golden Teak Polished Chrome 2.8W Linear 3000K Clear Polished Chrome 2.8W Linear 3000K	fixtures include onorail Adapter
PD223ABPCLEDR PD223SIPCLEDR PD223LTPCLEDR PD223TZPCLEDR	Crystal Blue AB Polished Chrome 2.8W Linear 3000K Silver Polished Chrome 2.8W Linear 3000K Light Topaz Polished Chrome 2.8W Linear 3000K Topaz Polished Chrome 2.8W Linear 3000K	
PD223BDPCLEDR PD223RSPCLEDR PD223VTICLEDR PD223MSPCLEDR PD223MSPCLEDR PD223DSPCLEDR	Bordeaux Polished Chrome 2.8W Linear 3000K Rosaline Polished Chrome 2.8W Linear 3000K Violet Polished Chrome 2.8W Linear 3000K Medium Sapphire Polished Chrome 2.8W Linear 3000K Dark Sapphire Polished Chrome 2.8W Linear 3000K	11"
PD223EMPCLEDR PD223LPPCLEDR PD22330CR30GT40GSPCLEDR PD22330EM40LP30CRPCLEDR PD22350CR50BDPCLEDR	Emerald Polished Chrome 2.8W Linear 3000K Light Peridot Polished Chrome 2.8W Linear 3000K 30% Clear 30% Golden Teak 40% Golden Shadow 2.8W Linear 30% Emerald 40% Light Peridot 30% Clear 2.8W Linear 50% Clear 50% Bordeaux 2.8W Linear	1.6"
PD22330TZ30BD40CRPCLEDR PD22340VI40RS20CRPCLEDR PD22340DS30MS30ABPCLEDR	30% Topaz 30% Bordeaux 40% Clear 2.8W Linear 40% Violet 40% Rosaline 20% Clear 2.8W Linear 40% Dark Sapphire 30% Medium Sapphire 30% Crystal Blue 2.8W Li	near c







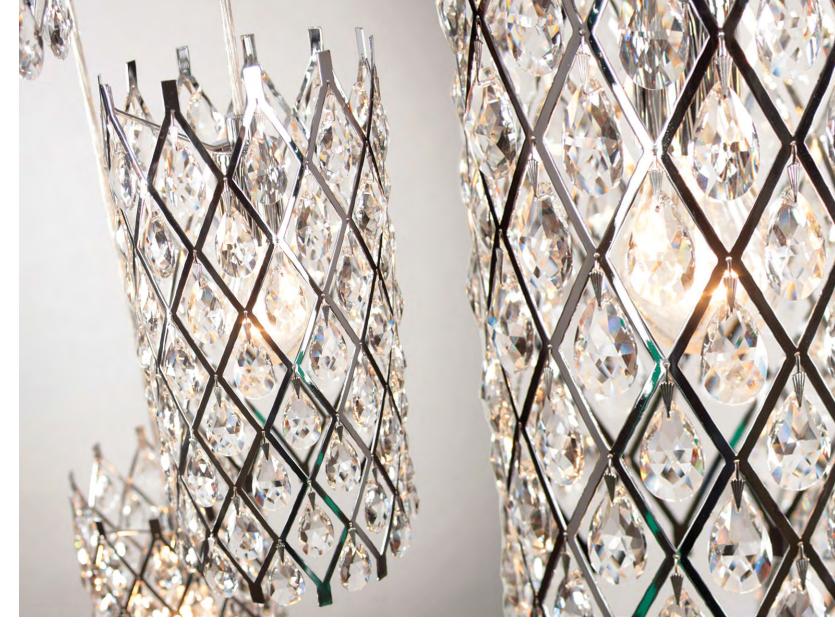



Diamanté Crystal Pendant

Expanded Polished Chrome Metal body and Clear Crystal Elements.

120 volt clear medium base 60 watt lamp.



CR clear		5 Medium Bas	se Incandesce	ent 1x60W
Color Options	Finish	Lamp	Mounting	
CR	PC	MB6	M	
	PC polished chrome		M monopo	int canopy





Sonos Up/Down

Anodized Aluminum wall washer up/down light. Wet Location Rated.





Wall projection 3.75"

Sonos Down

Anodized Aluminum wall washer down light. Wet Location Rated.






vvaiipic

Margaux


A contemporary bath bar featuring tubular cased opal glass that nicely diffuses incandescent or fluorescent light.

Perfect for any wall sconce application, especially in damp locations. Satin Nickel Metal accents.

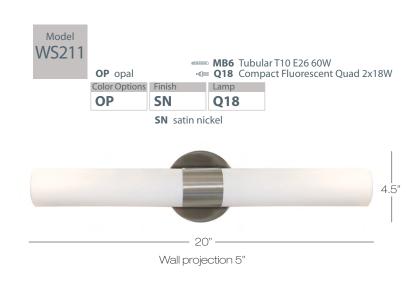



- WISTER

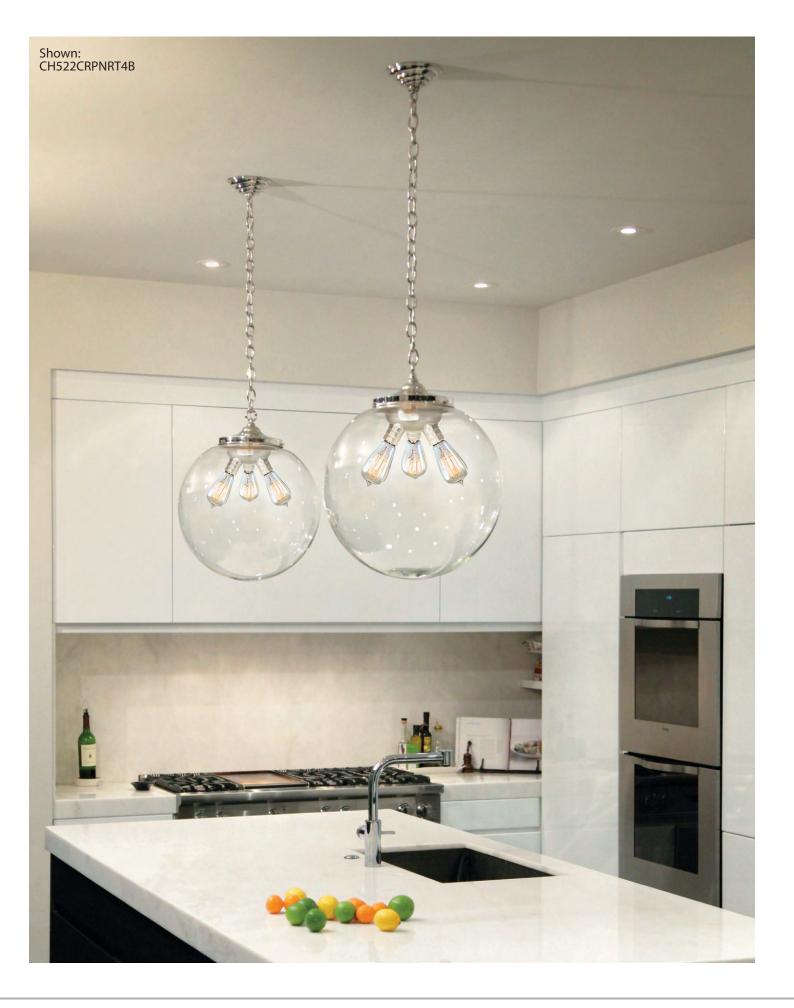



PN polished nickel

Clear, Black, Brown, Dark Grey, Orange and Red Vintage Cloth cord available (consult factory).

KILO RETRO • Chandelier





LED Cylinder

Powder coated white or anodized silver finish. Custom color(consult factory).

LED wattage 14 watt , Citizen COB CLL-022 CCT: 3000 K

CRI:85

Lumen output: 1000 lumens



Finish Lamp Mounting
WH LED M

SI silver
WH white M monopoint canopy

Overall height:: 15" minimum - 71" maximum

—— 2.8"——








Long panels of curved steel in white enamel finish. Hanging adjustable to 8 ft. 3 Stainless Steel cables field adjustable through Griplock system.







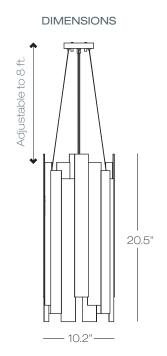



Alta Ceiling


Metal backplate with frosted opal glass diffuser. High Quality ceiling Luminaire. Polished Chrome decorative trim.

Unique backlight wall or ceiling wash.

Features


- High Quality steel and frosted opal glass.
- Beautiful shape, soft and comfortable light.
- High Quality and stable LED Chips, energy saving and Eco-friendly.
- No Hazardous materials such as Mercury and Lead, no IR and no UV.
- **LED DOB24** (DOB-Driver on Board 120v **90 CRI** 2000 Lumens). Fully Dimmable with ALL standard dimmers (Triac/Incand.,ELV, LVM)






LAMPING DATA						
Lamp	Watts	Lumens	CCT	CRI	Aver. Life	
DOB24	24	2000	3000K	>90	50,000 hrs	
DOB10	10	1000	3000K	>90	30,000 hrs	
Q13	13	600	2700K	>75	10,000 hrs	
MB4	40	340	2700K	>75	1,000 hrs	

Above info is per lamp. For accurate lumens, multiply by # of lamps in fixture.












CL530FRPCQ13

ALTA CEILING stonelighting.net

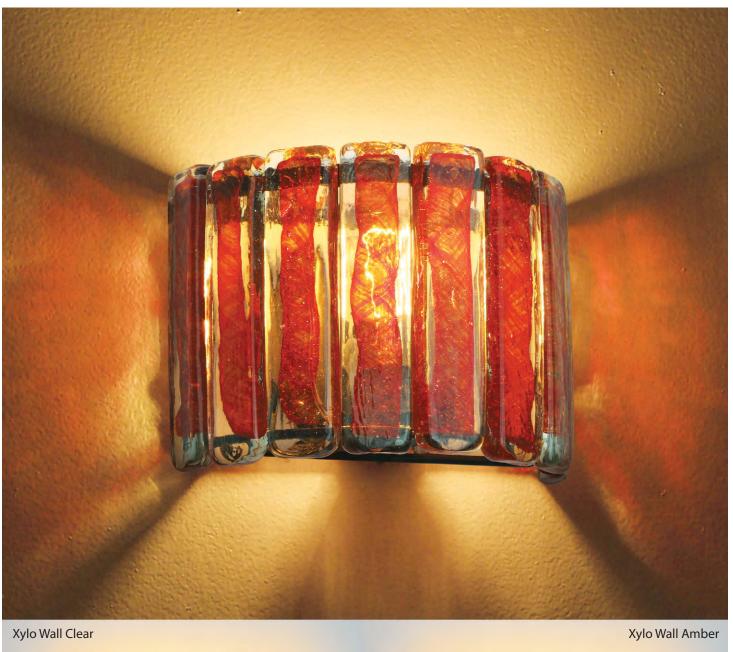







Xylo Pendant , Xylo Wall

Unique hand crafted iron frame pendant and wall sconce with Retro socket and black cloth covered cord, thick clear and colored glass panels hanging on top edge of frame.

Together they create a beautiful light pattern, a work of art.








Wall projection 4.25"







Layla Wall

LED Wall Luminaire. Available in Polished Chrome or Satin Nickel faces with reflective white powder coated interior. Fully Dimmable.

LED Light Source COB 5W Bridgelux CCT 3000K CRI 90 Light Output 435 lumens Life 30,000 hours



SN
PC polished chrome
SN satin nickel







Amber

Opal



Red



Textile Fabric

Mocha

Avenue Complete

Rectangular light box with Murano blown glass front panel and side panels.

Each glass panel has a unique band of colorful Frits and genuine silver flakes.

TF: textile fabric encased in frosted acrylic diffuser.




SN satin nickel

	Color Options	Finish	Lamp			
	OP SN		Q18			
			■LA10 L			
	MO mocha		₽L5 LED	► L5 LED G6.35 6W		
	OP opal		■ MC5 Mi	™MC5 Minican 50W		
	RD red TF textile fabric		< □■Q18 Co	mpact Fluorescent Quad 18W		
			DOB24	LED DOB24 (DOB-Driver on Board	(k	
				120v 90 CRI 2000 Lumens.		

* LED DOB24 (DOB-Driver on Board 120v 90 CRI 2000 Lumens). Fully Dimmable with ALL standard dimmers (Triac/Incand.,ELV, LVM)

LAMPING	LAMPING DATA						
Lamp	Watts	Lumens	CCT	CRI	Aver. Life		
DOB24	24	2000	3000K	>90	50,000 hrs		
LA10	10	840	3000K	>80	30,000 hrs		
L5	6	330	3500K	>80	30,000 hrs		
MC5	50	600	3000K	>75	2,000 hrs		
Q18	18	1210	2700K	>75	10,000 hrs		

Above info is per lamp. For accurate lumens, multiply by # of lamps in fixture.







Zo Zo Wall

Linear Wall Washing LED Luminaire. Plated steel construction, frosted white acrylic spread diffuser.

Dimmable with electronic low voltage dimmer.

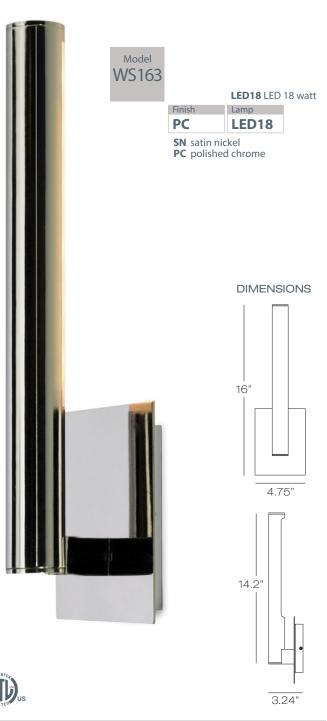






Regis Suspension

Cased Opale Glass Cylinder.

12 V or 120 V options with coaxial cable or clear SVT cable.

12v offers choice of halogen or LED lamping


120v offers incandescent or compact fluorescent lamping

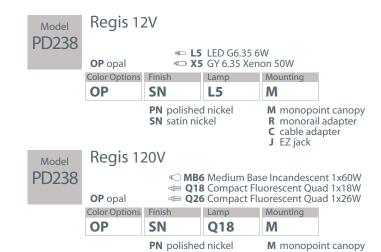

Regis Wall

Cased Opale Glass Cylinder on rectangular backplate.

SN satin nickel

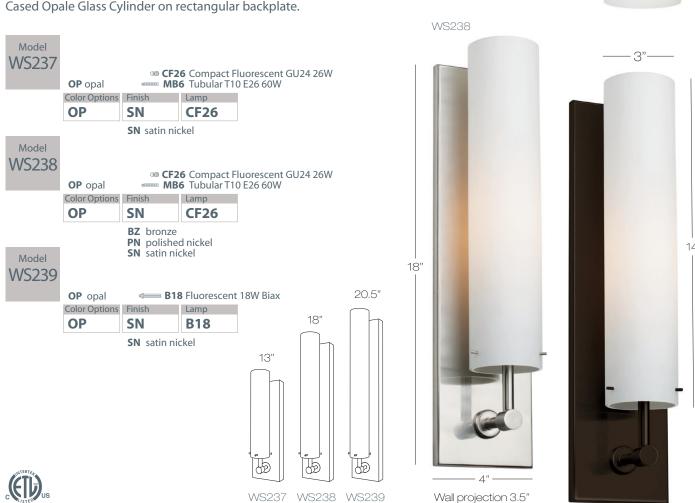

14"

— 3"—







Echo Wide

Aluminum Indoor/Outdoor fixture ships with a set of (2) frosted acrylic diffusers and (1) matching solid aluminum shield.

For up and down light simply install both frosted acrylic diffusers. For down light only install aluminum shield on top and acrylic diffuser on bottom.

LED, Med. base LED A19 or CF18 Compact Fluorescent GU24 18W

LAMPING DATA						
Lamp	Watts	Lumens	CCT	CRI	Aver. Life	
LA12	12	840	3000K	>85	30,000 hrs	
CF18	18	1210	2700K	>70	10,000 hrs	
DOB10	10	1000	3000K	>90	30,000 hrs	

Model WO826

LA12 LED A12W
CF18 Compact Fluorescent GU24 18W
DOB10 LED DOB10 (DOB-Driver on Board)
120v 90 CRI 1000 Lumens.

FINISN	CF18	
BA		
BA brushed alun BZ bronze WH white	ninum	





White



Brushed Aluminum



Wall projection 4.5"

Echo Wall

Half cylinder exterior luminaire. Brushed Aluminum or Bronze exterior powder coated finish equipped with a galvanized outdoor rated E26 socket that will allow for Incandescent lampings or GU24 Spiral Fluorescent lamping with Incandescent adapter.

Model WO805

BA brushed aluminum **BZ** bronze

BZ* **MB10**

■ MB10 Base Incandescent 100W CF18 Compact Fluorescent GU24 18W

*Consult factory for custom powder coated finishes

Bronze



Wall projection 4"



ECHO SERIES • Wide - Wall



LED Tape-Generation 2

Stone Lighting's Generation 2 Flexible LED Strip tape is superior to the competition because we offer AC/DC tape, we are offering you a tape that will work with any magnetic transformer or ANY no load electronic transformer. This makes it highly versatile and very user friendly.

It has a pin connection based system that prevents connection and conductivity problems. It is a very good quality white light with a high CRI index and high output light generation.

Below are some of the main features of our new and best to date tape:

- 3 watts per foot of length.
- 12 LEDS per foot.
- 200 Lumens per foot.
- CRI >85
- IP64
- 3000K CCT (+ OR 75) Very Tight Color Binning.
- 50,000 hr life.
- May be dimmed with Electronic Low Voltage (ELV) dimmers, when powered by electronic no-load transformer.

- Silicone cased tape with 3M adhesive backing Damp rated.
- AC/DC may be powered by any magnetic transformer or ANY no load electronic transformer.
- Power cable is 6 feet.
- We stock the following lengths of tape so you don't have to worry about cutting tape:
- Interconnect cables in 3", 12", 72".



ITEM	VOLTS	LENGHT
LEDTPWW1204	12v	4" Long
LEDTPWW2404	24v	4" Long
LEDTPWW1212	12v	12" Long
LEDTPWW2412	24v	12" Long
LEDTPWW1260	12v	60" Long
LEDTPWW2460	24v	60" Long
LEDTPWW12192	12v	16' Long
LEDTPWW24192	24v	16' Long

CCT= 3000K, 3W per foot length, Lumens per foot= 200, CRI = >85

ITEM	VOLTS	WATT
PWPLGIN12302	12v	30W
PWPLGIN24302	24v	30W
PWPLGIN12602	12v	60W
PWPLGIN24602	24v	60W

No Load Plugin Transformer for LED Tape

ITEM	VOLTS	WATT	
PWTP121002	12v	100W	
PWTP241002	24v	100W	

No Load Remote Transformer for LED Tape

ITEM	
LEDPWRCONN6	72" Power Supply Wire with
	Female Connector

ITEM	DESCRIPTION
LEDTPCONLW	LED Tape 2 Way L-Connector
LEDTPCONXW	LED Tape 4 Way X-Connector
LEDTPCONTW	LED Tape 3 Way T-Connector
LEDTPENDCONW	LED Tape End Cap
LEDTPJNR	LED Tape Male-Male Pin Connector
LEDTPJNRCBL3W	LED Tape 3" Flexible Conn.Wire
LEDTPJNRCBL12W	LED Tape 12" Flexible Conn.Wire
LEDTPJNRCBL72W	LED Tape 72" Flexible Conn.Wire
LEDTPMTGCLP	LED Tape Mounting Clip





LED TAPE GENERATION 2



Breeze Fans

Stone Lighting's Breeze Fan is the lighting industry's first low voltage fully functional and practical fan that is compatible with Monorail, Cable, and Monopoint installations.

Compatible with most low voltage systems that utilize a low voltage jack and port system commonly used by several other companies that offer Low Voltage Solutions.

Breeze is available in an elegant Satin Nickel finish. The fan has a 7" stem and is fully adjustable with 360 degree rotation and a 270 degree tilt.

Each Breeze Fan consumes 5 watts of power, so using a Stone Lighting No Load Transformer for any monopoint application allows for sleek recessing of the transformer in the electrical box.

The fans also work perfectly alongside any low voltage pendant or head on monorail or cable light applications.


On/Off Independent Switch Feature.

Each Fan can be independently turned off by rotating the handle counterclockwise 180 degrees approximately and turned back on by hand tightening the handle (turn clockwise until snug.)










BREEZE FAN IS A PATENT PENDING DESIGN ORIGINATED AND PROPERTY OF STONE LIGHTING.






14 Light Modular Canopy

Our newest canopy innovation is modular in concept. Unparalleled in it's versatility, our new 14 light canopy offers the customer the ability to make a multitude of head or pendant placement variations and at the same time cover any unused and unsightly open ports. We have designed a simple half dome that covers up to 10 ports on the canopy. Simply screw on the half dome and decoratively cover a port if you desire. For example, if you want to change your 14 light canopy to a 10 light application simply cover any 4 ports you desire.

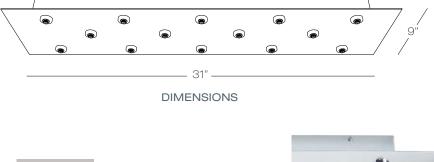



See an example below of port being covered in which you make a custom zig zag design placement.



Powered by 2 x 150 watt electronic tranformers you can go as low as only using 4 of the 14 ports.

We also can offer the canopy for LED applications.

Finally a solution for your customer that does not necessitate purchasing several different canopies when one will do the job of several!!!!








3 Light Rectangular Canopy


3 Light EZ Jack Rectangular Canopy Mounts to a standard 4" junction box.







14 LIGHT MODULAR CANOPY

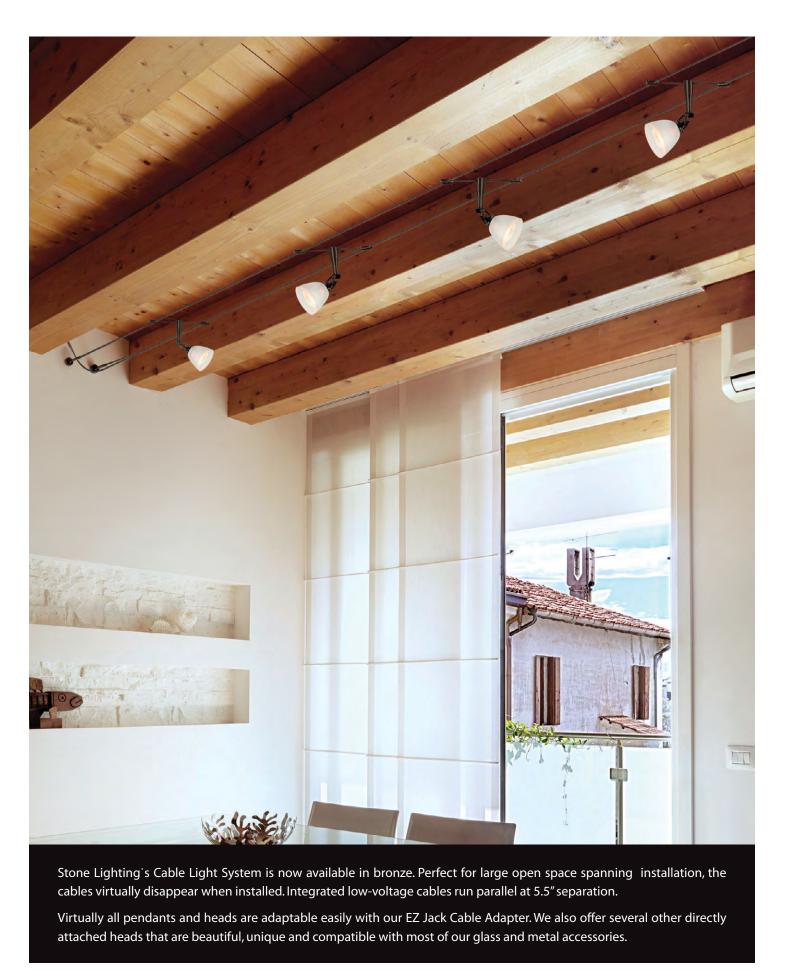

DESIGN

Determine what you want to light and the design concept you are trying to create. You can choose from cable heads and pendants as outlined in our main book (pages 50-61) in satin nickel. In this section the same numerous and varied choices are shown in our beautiful new bronze plated finish.

Cable heads can be chosen from pages 62-63 and you may also choose compatible heads and pendants in bronze and satin nickel from pages 70-157 in the main Stone Lighting catalog. Simply attach any low voltage head or pendant to the Stone Lighting Cable System by specifying our Cable EZ Jack Adapter (see page 60).

Choose your decorative elements and attachable accessories in glass and metal shown in this section. (page 63)

SPECIFY CABLE LENGTH.

Cable Bare

Rated for 300W at 12V, 600W at 24V load: Voltage drops occur at 30' with 12V, and 60' with 24V.

CSCBLBAREBZ

#10 gauge tin-plated copper cable with Kevlar core.

SPECIFY BRONZE HARDWARE, CANOPIES AND TRANSFORMERS.

Universal Turnbuckles (2pc. set)

1 set (min) per cable run needed or use 2 sets for tightening cables at both ends. When ceiling mounted, cables drop 2.5" from ceiling. All turnbuckles include mounting hardware for drywall. Special hardware is available for brick, cement or plaster surfaces (specify when ordering).

Slimline Turnbuckles (2pc. set)

Slimline Turnbuckles tighten the cables and can be used for a cable run of 20 ft or less. They mount to wall or ceiling. When ceiling mounted, the cable is positioned 1 inch below the ceiling. Insulated version is required if mounting to metal (consult factory.)

Power Wall Anchors (2pc. set)

Comes as a pair of wall or ceiling anchors.

These anchors can be used for feeding power or a set of dead wall anchors. To feed power, use a remote transformer (sold separately.)









CSSLTRNBKL(BZ,SN)



CSWALANC(BZ,SN)





Adjustable Cable Hanger 12ft

Used to support runs over 20' long so cable does not sag. Wire grip allows easy adjustability.

CSCBLADJ12BZ

Cable EZ Jack Adapter

Allows any EZ Jack element. Head or Pendant to mount and

Conductive Connector (2pc.set)

Isolating Connector (2pc.set) Connectors join cables end to end and

isolate power feeds from each other.

Connectors join cables end to end to continue conductivity.

CSCNSBZ

CSCNISO



CSCNISO

CSCNSBZ



hang from cable run.

CSEJADPBZ

Surface Mounted Transformers

SMT	DESCRIPTION	MODEL NUMBER	INPUT	OUTPUT	DIMMERTYPE
6"	12V/300W Surface Mount Cable Transformer 30" Power feed cable	PWECBL300ABZ	1x120 VAC/2.5A	1x300W 12VAC LED / HAL	Electronic Low Voltage Dimmer
	12V/60W 4"Surface Mount Cable Transformer 30"Power feed cable	PWECBL60BZLED	1x120 VAC/0.50A	1x60W 12VAC LED / HAL	Electronic Low Voltage Dimmer

Single Feed Remote Canopies



CSCPRIGBZ

4" Round power feed canopy 20" single feed rigid connector



CSCPSFTBZ

4" Round power feed canopy 30" single feed soft feeder connector

Dual Feed Remote Canopies



CSCPRIGDUBZ

4" Round power feed canopy 20" dual feed rigid connector for 600W remote transformer



CSCPSFTDUBZ

4" Round power feed canopy 30" dual feed soft feeder connector

Remote Transformers

REMOTE TRANSFORMER	DESCRIPTION	DIMENSIONS LxWxH (in)	MODEL NUMBER	DIMMER TYPE
	Jbox Electronic 60W 120V 0.50Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	2.2″x1.3″x0.82″	PWE60NL	Electronic Low Voltage Dimmer
	Remote Electronic 60W 120V 0.50Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	8.15"x2"x1.70"	PWERM60LED	Electronic Low Voltage Dimmer
	Remote Electronic 150W 120 V 1.25 Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	9.2″x3.4″x1.70″	PWERM150LED	Electronic Low Voltage Dimmer
	Remote Electronic 300W 120 V 2.5 Amp Output 12V AC LED COMPATIBLE UL2108 Short circuit and thermal protection * 277V available upon request	9.2″x3.4″x1.70″	PWERM300LED	Electronic Low Voltage Dimmer
	Remote Magnetic 150W 120V 1.25Amp Multitatp Output 12V, 13V, 14V, 15V 12.5Amp UL2108 Short circuit and thermal protection * 277V available upon request	8.75"x4.33"x3.82"	PWMRM150	LVM Dimmer
	Remote Magnetic 300W 120V 2.5Amp Multitatp Output 12V, 13V, 14V, 15V 25Amp UL2108 Short circuit and thermal Protection * 277V available upon request	8.75"x4.33"x3.82"	PWMRM300	LVM Dimmer
	Remote Magnetic 600W 120V 5Amp Dual Multitatp Output 12V, 13V, 14V, 15V dual 25Amp UL2108 Short circuit and thermal protection * 277V available upon request	9.52″x5.31″x4.84″	PWMRM600	LVM Dimmer







Decorative Elements

Aspen Head

Highly adjustable head tilts 140° within ring. Ring will rotate 360°.

Can be accesorized with elements on next page.

Model CB903		16 5W alogen 50W	
	Finish	Lamp	Mounting
	BZ	M5	C
	BZ bronze		C cable adapter

Snowmass EZ Jack Head

Head rotates 360°, swivels 220°, pivots on horizontal and vertical axis.

Can be accesorized with elements on next page.

Model CB902		6 5W llogen 50W	
	Finish	Lamp	Mounting
	BZ	M5	C
	BZ bronze		C cable adapte

Vail Pivot Head

Head swivels 220°, pivots on horizontal and vertical axis. Can be accesorized with elements on next page.


Model CB900	◎ D5 LED MR16 5W <] M5 MR16 Halogen 50W			
	Finish	Lamp	Mounting	
	BZ	M5	C	
	BZ bronze		C cable ada	pter

Whistler Head

Head pivots 220° on two axis, field cuttable rods.

Can be accesorized with elements below.


Model CB901		D5 LED MR1 M5 MR16 Ha		
	Finish	Lamp	Mounting	
	BZ	M5	C	
	BZ bronze		C cable adapter	



Cable Head Top

Boroscillicate glass tube in frost or amber meant to hang on vertical or horizontally mounted cable runs.

Model CB507	AM amber FR frost		3 L2 LED G4 → X3 GY6.35		
	Color	Finish	Lamp	Mounting	
	AM	BZ	Х3	C	
		BZ bronze		C cable adap	otei











Each element easily attaches with a simple spring clip. (included)









BRONZE CABLE LIGHT SYSTEM

SORAA VIVID 2 - SNAP COMPATIBLE

Soraa Vivid 2 MR16 lamps feature a 10 degree beam with choice of 2700K, 3000K or 5,000 color temperatures. Soraa lamps are a halogen replacement and 80% more energy efficient than standard halogen lamps. Lifetime of 35,000 hours. Works with magnetic and electronic transformers and dimmers. Add the optional Optical Accessories below to fine tune lighting. All accessories are magnetic self-centering and fit all fixtures.

SORAA 2700K LAMPS

10 degree beam, 2700K, 4300 CBCP, 8 Watt, 12VAC, 95CRI; LED retrofit lamp to replace 12VAC 40W halogen MR16 lamps for use in indoor and outdoor applications. Suitable for enclosed fixtures. UL and CUL listed for use with 12VNEC Class 1 and Class 2 Systems.



10 degree beam, 3000K, 4500 CBCP, 8 Watt, 12VAC, 95CRI; LED retrofit lamp to replace 12VAC 40W halogen MR16 lamps for use in indoor and outdoor applications. Suitable for enclosed fixtures. UL and CUL listed for use with 12VNEC Class 1 and Class 2 Systems.

SORAA 5000K LAMPS

10 degree beam, 5000K, 5180 CBCP, 8 Watt, 12VAC, 95CRI; LED retrofit lamp to replace 12VAC 40W halogen MR16 lamps for use in indoor and outdoor applications. Suitable for enclosed fixtures. UL and CUL listed for use with 12VNEC Class 1 and Class 2 Systems.

SORAA OPTICAL ACCESSORIES - OPTIONAL



Beam Spreader

Use in an application when you desire to modify the beam spread of your lamp. We offer 25°, 36° and 60° options.

Beam	Part Number
25°	AC-GC-2525
36°	AC-GC-3636
60°	AC-GC-6060



Linear Lens

Use in wall washes and illuminating asymmetric objects.

Beam	Part Number
10° – 25°	AC-GE-1025-00
10° – 36°	AC-GF-1036-00



Louvers

Eliminates high angle glare, making light beams disappear in downlight applications.

Cutoff	Angle
40°	_

Part Number AC-LU-4040-00-00

CCT Shifter

Use in any application where you desire to modify the color temperature of your lamp.

Create custom colors for festive occasions or brand identity. Single Lamp SKU can be used for multiple color temperatures.


CTO*	Part Number
1/4 CTO	AC-CC-0001-00
1/2 CTO	AC-CC-0002-00
3/4 CTO	AC-CC-0003-00




SORAA VIVID 2

For applications that require very high light output from tiny form factors these lamps deliver unprecedented performance and light quality. Soraa lamps emit perfect spectrum of light, and have a CRI of 95. We are proud to offer Soraa's top 10 lamps which are sure to meet your lighting needs.

Model	Description	CRI	Lumens
00223 00275	MR16 Vivid 2 9.8W 2700 25 degrees MR16 Vivid 2 9.8W 2700 36 degrees	95 95	400 400
00273	MR16 Vivid 2 9.8W 3000 25 degrees	95	420
00273	MR16 Vivid 2 9.8W 3000 36 degrees	95	420
00271 00247	MR16 Vivid 2 10W 2700K 10 degrees *SNAP LAMP MR16 Vivid 2 11.5W 2700 25 degrees	95 95	400 460
00255	MR16 Vivid 2 11.5W 2700 23 degrees MR16 Vivid 2 11.5W 2700 36 degrees	95	460
00269 00245 00253	MR16 Vivid 2 10W 3000K 10 degrees *SNAP LAMP MR16 Vivid 2 11.5W 3000 25 degrees MR16 Vivid 2 11.5W 3000 36 degrees	95 95 95	420 480 480



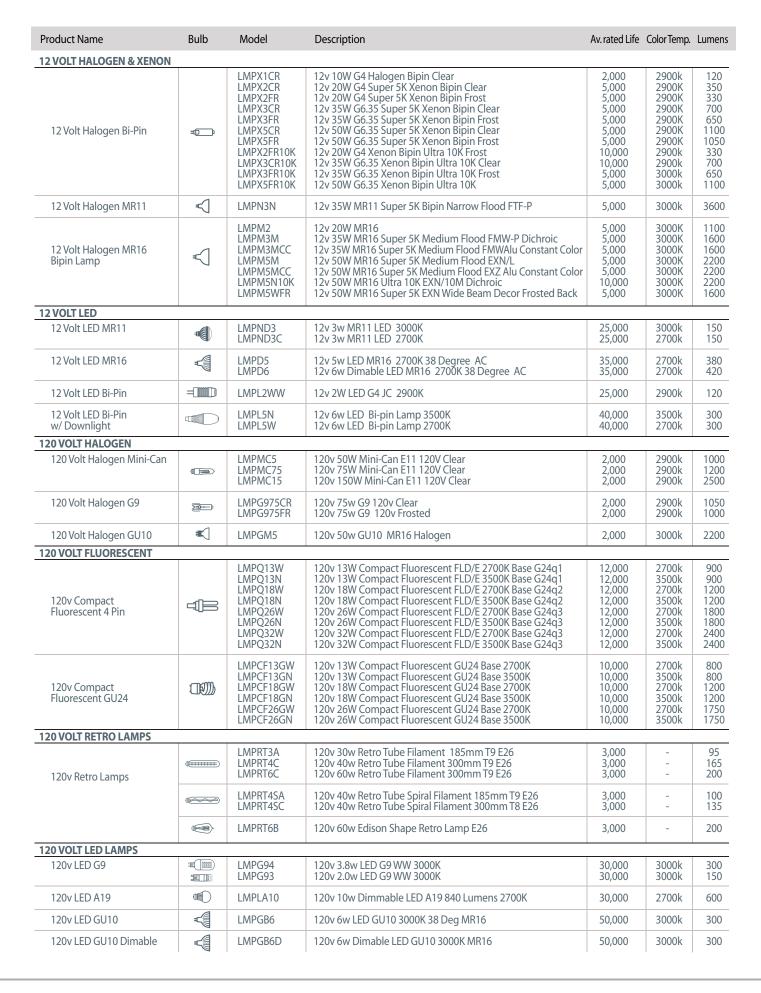

SORAA LAMPING GUIDE stonelighting.net



Corporate Office 2630 Flossmoor Road Suite 102 Flossmoor, IL 60422-1560 Phone: (312) 240-0400

Fax. (866) 300-9283

info@stonelighting.net

stonelighting.net