




- 1 Turn off power.
- 2 Loosen Hex screws and Remove backplate from body.




- 5 Wire red transformer output wires to body input wires.
- 6 Mount body onto backplate, which is installed to the junction box.

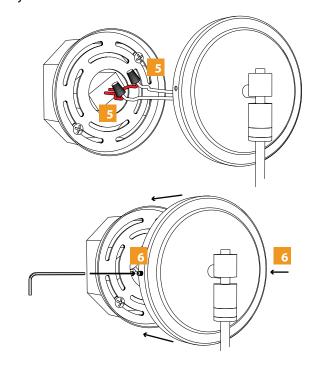

3 Install backplate to junction box.



4 Wire black and white transformer wires to junction box wires.



Install glass via three thumb screws in an accessory bag.
Apply power.

SAVE THIS INSTRUCTIONS