




- 1 Turn off power.
- 2 Loosening set screws, remove backplate from backplate cover.
- 3 Install backplate onto junction box.

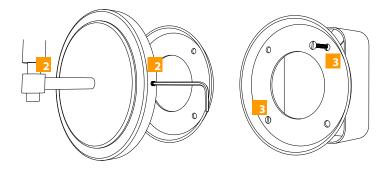


4 Using wire nuts provided, connect black and white wires of transformer to wires in j-box.



5 Connect red transformer wires to fixture wires, using wire nuts provided.



6 Install backplate cover on mounted backplate with hex nuts.



7 Install lamp.



8 Turn on power.

